

LOAD GUARD RP81

RP81-1-3-400

BELASTNINGSRELÄ COSFI 3X400V

- Load guard for 3-phase motors
- Power factor metering
- Adjustable time delay 0-20 sek. at motor start
- Selectable release of relay at max. or min. load
- 1-pole relay output 8A / 250 VAC





PRODUCT DESCRIPTION

C-mac® module type RP81 is used for load monitoring of 3-phase motors, as the phase angle ($\cos \varphi$) between motor current and -voltage changes in proportion to the mechanical load of the motor. You will see the biggest change in phase angle, if the motor is loaded between 0 and 60% of nominal load, which makes the RP81 suitable for monitoring of V-belts, pumps running dry, etc.


RP81 can be connected directly to motors with nominal current up to 6 A. If the current is bigger, you use a standard current transformer .

SPECIFICATIONS

Approvals	CE
Depth	74 mm
Frequenze	40-70Hz
Height	76 mm
Materials Cover	Noryl
Measuring Range	0,5-6A
Power supply V AC	400 V AC
Temperature range from	-20 °C
Temperature range to	60 °C
Time Delay Start	0-20 s
Weight	110 g
Width	38 mm

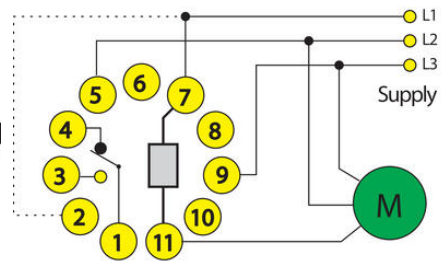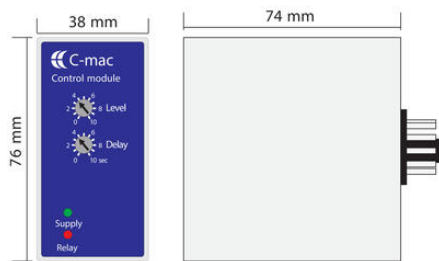

Example 1: without current transformer.
(motor current smaller than 6 A)

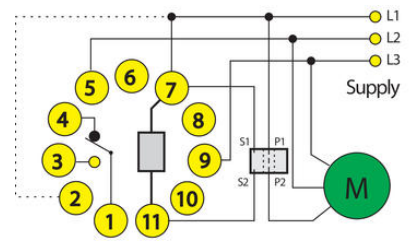

Example 2: With current transformer.
(motor current bigger than 6 A)
Note: the current transformer must be connected as shown (P1 / P2 and S1 / S2)

Phase angle ($\cos \phi$)

