

10" HD DIGITAL MONITOR

ORL0224000

Monitor HLED 10" SingleView 1m MRB


- Compatible with HMOS DigiCoax cameras
- Operating temperature -40 to +85 ° C
- Designed for demanding industrial environments
- Real-time operation



PRODUCT DESCRIPTION

SPECIFICATIONS

Display Size	10,1 "
IP Class	IP54
Resolution	WXGA 1280 x RGB x 800
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Digital
Vibration Resistance	50G

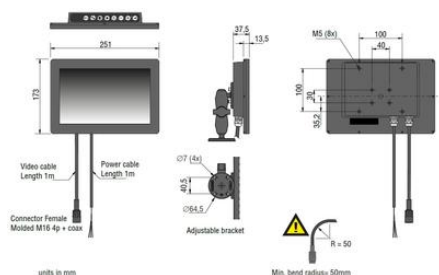

Power cable open wired (Secure the power input with a 5A fuse)

1 = Red = Video power in: 12V/24V
 2 = Blue = Aux 1
 3 = Brown = Aux 2
 4 = White = Power DV in
 5 = Grey = CAN-H
 6 = Yellow = CAN-L
 7 = White/yellow = N.C.

Video cable front side molded 4p + Coax female connector:
 1 = Black = DV
 2 = Red = Power
 3 = Yellow = Aux 1
 4 = Grey = Aux 2
 5 = Coax core = Video
 6 = Coax shield = Video GND
 Shielding = To housing

