MECHAN SSR ELETRONIC SAFETY SWITCH

SSR-21-03M
Electronic safety switch, 2 NO + 1 NC, 3m cable



- Electronic safety switch
- IP67 sealing, ABS
- Switching distance 7mm
- Dual colour LED status indication
- Max. current: 24 V DC/2 A

PRODUCT DESCRIPTION

SS-R safety switches are standalone electronic, non-contact, safety switches. With 2NO + 1NC contacts, capable of switching 2A at 30Vdc or 110Vac. With tamper resistant, electronic switching, the SS-R are suitable for use with most safety relays. A dual colour, built in LED, helps the operator in speedy fault diagnosis. The SS-R safety switches are available with 3, 5, 6, 10 or 15 metre pre-wired cables which are fully sealed and suitable for use in most wet / harsh environments.

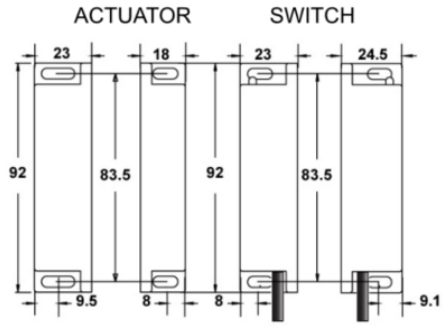
- Electronic Safety Switch
- 2 NO + 1NC Contacts
- Fully Encapsulated, IP67
- Pre-wired, 3, 5, 6, 10 or 15 metre cable
- Dual Colour LED indication

SPECIFICATIONS

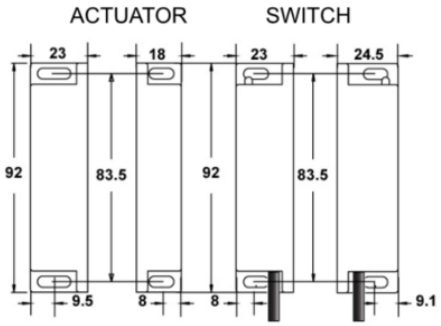
Safety contact NO	2
Signal contact NC	1
Contact Current Max	2 A
Activation Distance From	7 mm
Activation Distances	11 mm

Material Case	ABS plastic
IP Class	IP67, IP69K
Temperature range from	-25 °C
Temperature range to	55 °C

B10d	2,0 milj.


ACTUATOR
SWITCH
23
18
23
24.5
92
83.5
92
83.5
9.5
8
8
9.1

SS-R


ACTUATOR
SWITCH
23
18
23
24.5
92
83.5
92
83.5
9.5
8
8
9.1

SS-R