


## MECHAN HE2 ELECTRONIC HALL SAFETY SWITCH

HE2-SS-20-DC-03M

Electronic safety switch, 2 NO, 3m cable, SS


- Electronic, utilizes Hall-technology
- Coded magnetic safety switch
- Seal made of ABS or SS, IP67
- Switching distance 7mm
- LED indication

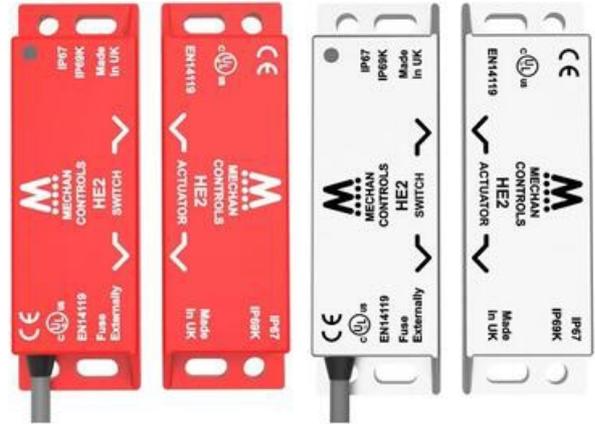

### PRODUCT DESCRIPTION

The HE safety switches have up to 2 x N/O + 1 N/C bidirectional solid state outputs along with a built in LED(s) for indication. When installed on a machine guard, power is applied, and the switch and actuator are within the specified operating range, the N/O Outputs will be closed, the N/C Output will be open. The HE safety switches are fully encapsulated into an ABS housing and are available with 5, 10 or 15 metre pre-wired cable. With a 7mm switching distance the actuator can approach the switch from most angles. When the switch is closed the targets on the printed face of the switch must be aligned.



- Coded magnetic operation, ABS housing
- 2 normally open + 1 normally closed output
- Solid state bi-directional outputs
- 24vDC operation
- LED indication



### SPECIFICATIONS

<b>Safety contact NO</b>	2
<b>Signal contact NC</b>	0
<b>Contact Current Max</b>	400 mA
<b>Activation Distance From</b>	7 mm
<b>Activation Distances</b>	14 mm
<b>Material Case</b>	Hardened stainless steel

IP Class	IP67, IP69K
Temperature range from	-25 °C
Temperature range to	55 °C
<b>B10d</b>	2,0 milj.

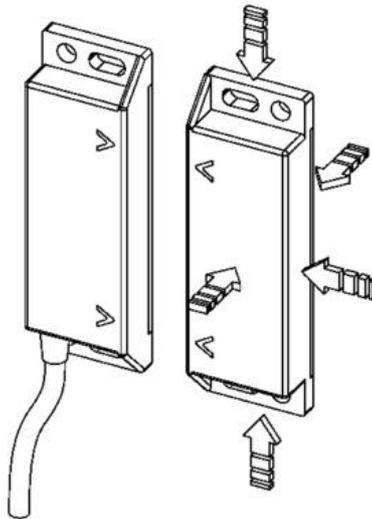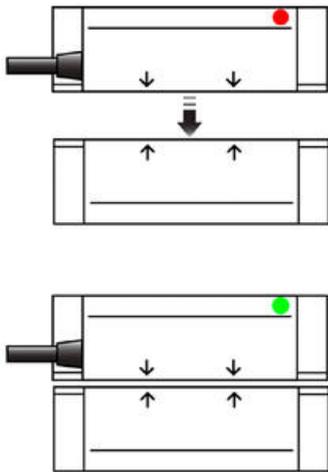

**Contacts 2NO**  
(Note: Yellow & Green not connected)

