

QUADRO PROFILES



3031.2206
GELBAU CONNECTOR 22MM 8K2

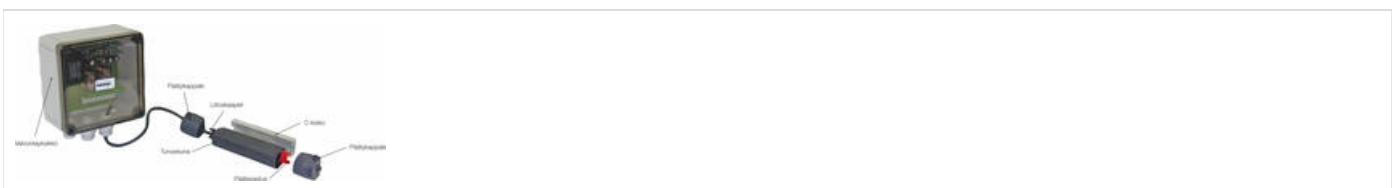


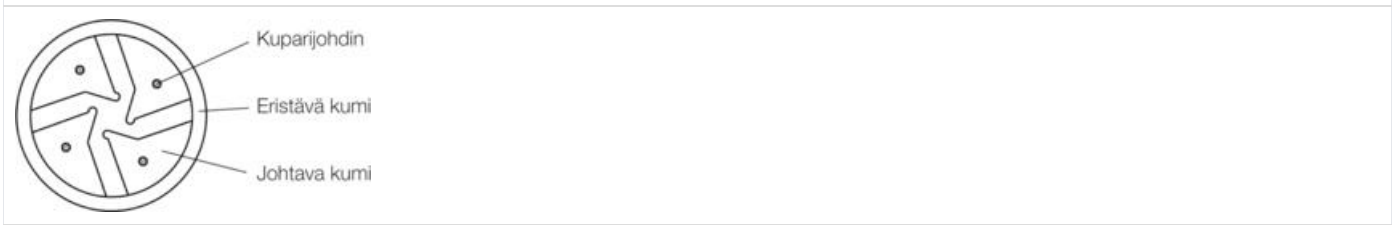
- 360° operating area
- Ø18 mm and Ø22 mm
- High level of sensitivity
- Easy to install

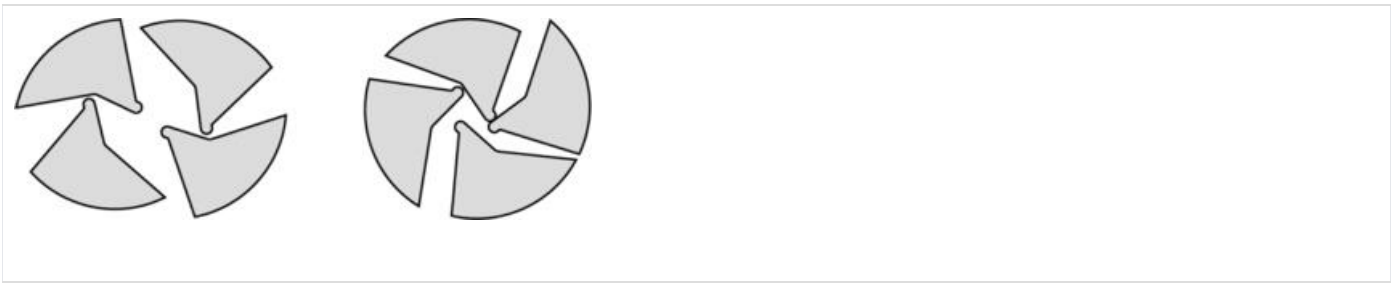
PRODUCT DESCRIPTION

The Gelbau Quadro-Profile is used primarily in the field of local public transport, where it is installed as a safety feature for the closing edges of passenger doors in buses and trains. The EPDM profile can be used only in conjunction with a sealing profile. It is simply pushed into the hollow chamber of existing or newly developed sealing profiles. The profiles have a diameter of 18 mm or 22 mm, and require a sheath-profile with a hollow compartment minimum diameter of 21.5 mm or 25.5 mm. The profile is characterised by a high level of sensitivity.

	
<p>Applications</p>	<p>Features</p>
<ul style="list-style-type: none"> • Public transport, buses, metro etc • Door systems such as sectional doors 	<ul style="list-style-type: none"> • 360° operation • Easy to install, can also be retrofitted • High level of sensitivity • Profile consists of four conductive zones, out of which at least three will always contact under mechanical pressure • Temperature range -40 °C...+80 °C



<p>Cross-cut section</p>

<p>360° operating range</p>



Coupling

