


HALOGEN-FREE TRUNKINGS

EHF-P2537

ALOFREE CABLEDUCT 25X37,5 (1Cart=32 pcs)

- Robust build
- Large selection
- DIN standardized
- Cover included

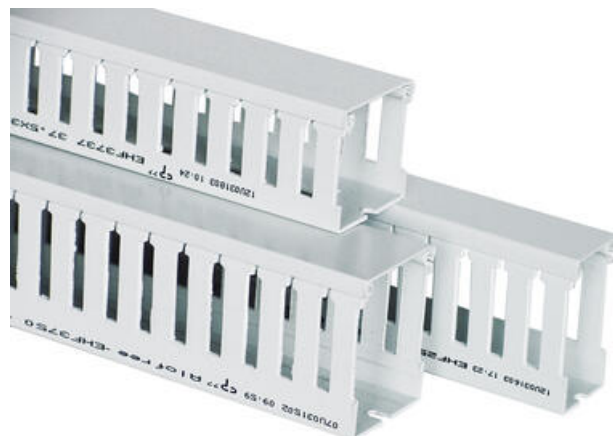

PRODUCT DESCRIPTION

Canalplast ALOFREE-series trunkings are suitable for environments where the development of toxic gases can not be tolerated, such as public areas, hotels, theaters, hospitals and transportation. Alofree-trunkings do not propagate flame. Sold only in full packages.

Two versions available: standard version EHF delivered in 2 meter long pieces, covers included.

NXA is specifically made for more demanding environments such as underground installations. Available in 0,5m length.

SPECIFICATIONS

Approvals	CEI EN50267-2-1, CSA US, EN45545-2, EN50085-2-3, ENISO4589-2, NFX 70-100, RoHS
Color	Grey
Dimension A	5 mm
Dimension E	7.5 mm
Height	37.5 mm
Length	2000 mm
Material	Self-closing P-Blend
Pack Size	32
Punching	DIN 43659 Standard
Temperature range bearing, from	-45 °C
Temperature range bearing, to	105 °C
Temperature range from	-25 °C
Temperature range to	105 °C

Weight Per Channel	0.48 kg
--------------------	---------

Weight per package	15.1 kg
--------------------	---------

Width	25 mm
-------	-------

