


## HALOGEN-FREE TRUNKINGS

EHF-P7550

ALOFREE CABLEDUCT 75X50 (1 Cart=12 pcs)

- Robust build
- Large selection
- DIN standardized
- Cover included

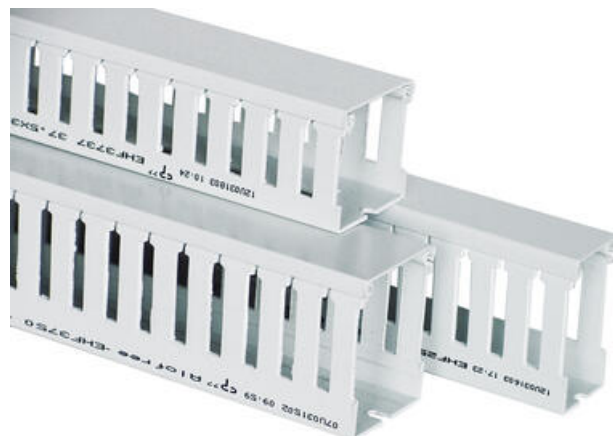

### PRODUCT DESCRIPTION

Canalplast ALOFREE-series trunkings are suitable for environments where the development of toxic gases can not be tolerated, such as public areas, hotels, theaters, hospitals and transportation. Alofree-trunkings do not propagate flame. Sold only in full packages.

Two versions available: standard version EHF delivered in 2 meter long pieces, covers included.

NXA is specifically made for more demanding environments such as underground installations. Available in 0,5m length.

### SPECIFICATIONS

<b>Approvals</b>	CEI EN50267-2-1, CSA US, EN45545-2, EN50085-2-3, ENISO4589-2, NFX 70-100, RoHS
<b>Color</b>	Grey
<b>Dimension A</b>	5 mm
<b>Dimension E</b>	7.5 mm
<b>Height</b>	50 mm
<b>Length</b>	2000 mm
<b>Material</b>	Self-closing P-Blend
<b>Pack Size</b>	12
<b>Punching</b>	DIN 43659 Standard
<b>Temperature range bearing, from</b>	-45 °C
<b>Temperature range bearing, to</b>	105 °C
<b>Temperature range from</b>	-25 °C
<b>Temperature range to</b>	105 °C

Weight Per Channel	1.14 kg
--------------------	---------

Weight per package	13.7 kg
--------------------	---------

Width	75 mm
-------	-------

