

**ORLACO -**

ORL0186010  
Camera EMOS 120




## PRODUCT DESCRIPTION

## SPECIFICATIONS

Camera Angle	120
IP Class	IP68, IP69K
Material	Anodized aluminum
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Vibration Resistance	50G

**Camera EMOS Ethernet** Front side of Molded M12-D 4p connector:




### Connector

1 = Orange/white = +Tx  
2 = Green/white = +Rx  
3 = Orange = -Tx  
4 = Green = -Rx

Overall shielding connected to connector housing.

### Open wires

**Open wires**  
1 = Red = Power  
2 = White = 0V

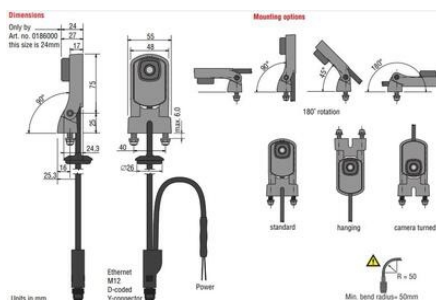

**Camera EMOS Ethernet** Front side of Molded M12-D 4p connector:



### Connector

1 = Orange/white = +Tx  
2 = Green/white = +Rx  
3 = Orange = -Tx  
4 = Green = -Rx


Overall shielding connected to connector housing.

### Open wires


**Open wires**  
1 = Red = Power  
2 = White = 0V

### Dimensions

Only by \_\_\_\_\_  
Art. no. 0186000  
this size is 24mm

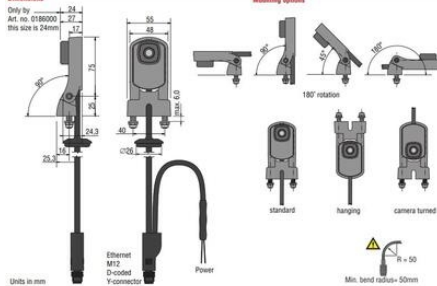

### Mounting options



standard

hanging

camera turned



Min. bend radius= 50mm