10" HD DIGITAL MONITOR

ORL0224000
Monitor HLED 10" SingleView 1m MRB





- Compatible with HMOS DigiCoax cameras
- Operating temperature -40 to +85 ° C
- Designed for demanding industrial environments
- Real-time operation

PRODUCT DESCRIPTION

SPECIFICATIONS

Display Size	10.1 en
IP Class	IP54
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Digital
Vibration Resistance	50G

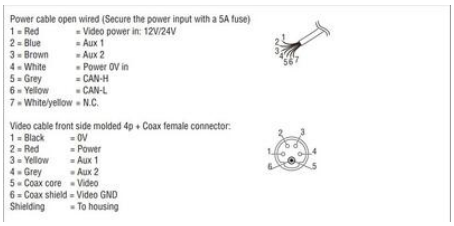

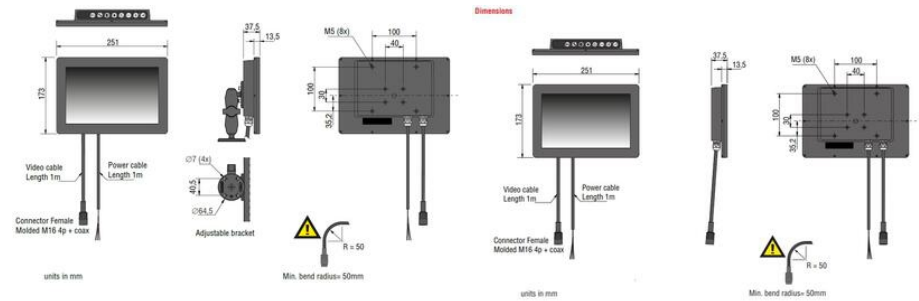

Power cable open wired (Secure the power input with a 5A fuse)



1 = Red = Video power in: 12V/24V
2 = Blue = Aux 1
3 = Brown = Aux 2
4 = White = Power 0V in
5 = Grey = CAN-H
6 = Yellow = CAN-L
7 = White/yellow = N.C.

Video cable front side molded 4p + Coax female connector:




1 = Black = 0V
2 = Red = Power
3 = Yellow = Aux 1
4 = Grey = Aux 2
5 = Coax core = Video
6 = Coax shield = Video GND
Shielding = To housing

Dimensions



units in mm



Min. bend radius= 50mm