

ORLACO -

ORL0506953

PTZ Camera Aluminium PAL RS232



PRODUCT DESCRIPTION

SPECIFICATIONS

Image Format	PAL
IP Class	IP69K
Supply Voltage DC Max	30 V DC
Supply Voltage DC Min	18 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Vibration Resistance	50G

Electrical connections


Cable Base, Art no 1221300

1 - Coax core	RS232	RS485
2 - Coax shielding	Video	Video
3 - Red	Camera power	Camera power
4 - Black	Camera OV	Camera OV
5 - Red/White	Pan/Tilt power	Pan/Tilt power
6 - Black/White	Pan/Tilt OV	Pan/Tilt OV
7 - Green	Serial 1 RS-232 TX	8 (Inv)
8 - Gray	Serial 2 RS-232 RX	A (non-Inv)
9 - Black/Gray	Serial OV	

1 = Red/blue	N.C.
2 = Black/blue	N.C.
3 = Blue	N.C.
4 = Brown	N.C.
5 = Shielding	N.C.

Cut off at wire entry
(In Junction box)

Dimensions

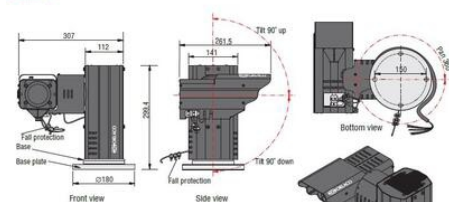

Units in mm

Cable length 5m
3.5m available for installation
Cable Base 98-100-11W
Art. no 1221300