

ORLACO -

ORL0186030

Camera EMOS 60



PRODUCT DESCRIPTION

SPECIFICATIONS

Camera Angle	60
IP Class	IP68, IP69K
Material	Anodized aluminum
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Vibration Resistance	50G

Camera EMOS Ethernet Front side of Molded M12-D 4p connector:




Connector

- 1 = Orange/white = +Tx
- 2 = Green/white = +Rx
- 3 = Orange = -Tx
- 4 = Green = -Rx

Overall shielding connected to connector housing.

Open wires

- 1 = Red = Power
- 2 = White = 0V

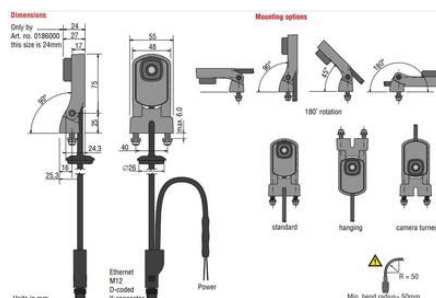

Camera EMOS Ethernet Front side of Molded M12-D 4p connector:



Connector

- 1 = Orange/white = +Tx
- 2 = Green/white = +Rx
- 3 = Orange = -Tx
- 4 = Green = -Rx


Overall shielding connected to connector housing.

Open wires


- 1 = Red = Power
- 2 = White = 0V

Dimensions

Only by _____
Art. no. 0186000
this size is 24mm

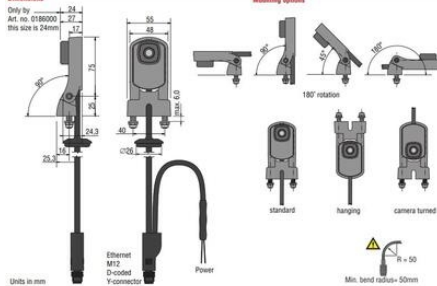

Mounting options



standard

hanging

camera turned



Min. bend radius= 50mm