

10" HD DIGITAL MONITOR

ORL0224010

Monitor HLED 10" MultipleView 1m MRB

- Compatible with HMOS DigiCoax cameras
- Operating temperature -40 to +85 ° C
- Designed for demanding industrial environments
- Real-time operation



PRODUCT DESCRIPTION

SPECIFICATIONS

Display Size	10.1 en
IP Class	IP54
Resolution	WXGA 1280 x RGB x 800
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Digital
Vibration Resistance	50G


Power cable open wired (Secure the power input with a 5A fuse)

- 1 = Red = Video power in: 12V/24V
2 = Blue = Aux 1
3 = Brown = Aux 2
4 = White = Power OV in
5 = Grey = CAN-Hi
6 = Yellow = CAN-L
7 = White/yellow = N.C.



Video cable front side molded 4p + Coax female connector:

- 1 = Black = OV
2 = Red = Power
3 = Yellow = Aux 1
4 = Grey = Aux 2
5 = Coax core = Video
6 = Coax shield = Video GND
Shielding = To housing

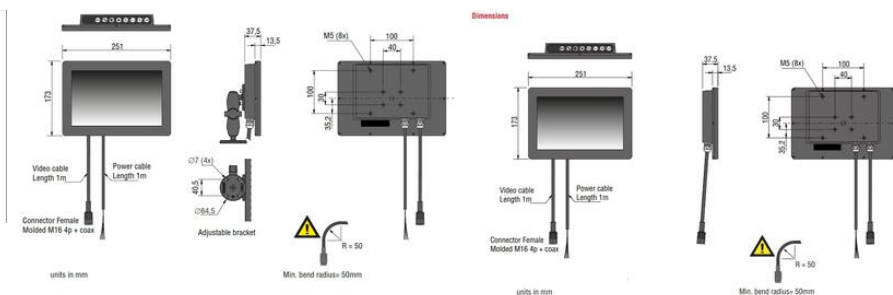

Power cable open wire (secure the power input with a 5A fuse)

1 = Red	= Video power in: 12V/24V
2 = Blue	= Aux 1
3 = Brown	= Aux 2
4 = White	= Power 0V in
5 = Grey	= CAN-H
6 = Yellow	= CAN-L
7 = White/yellow	= N.C.



video cable front side molded 4p + Coax female connector:

1 = Black	= 0V
2 = Red	= Power
3 = Yellow	= Aux 1
4 = Grey	= Aux 2
5 = Coax core	= Video
6 = Coax shield	= Video GND
Shielding	= To housing



Diagram of the Video Display Unit (VDU) showing dimensions and cable connections:

- Width: 251
- Height: 173
- Video cable Length 1m
- Power cable Length 1m
- Connector Female Moulded M16 4p + coax

units in mm

