ORLACO

ORLACO - REINFORCED CABLE

ORL0303342
Cable 1,5m Armored 4P Molded Connector




- For electromagnetic compatibility, 100 Vm
- M16 4-pole cast contacts or 7-pin cast contacts
- -30 to +80 °C


PRODUCT DESCRIPTION


Thanks to the internal reinforcement of galvanized braided steel wire, this cable provides good protection in demanding environments.
Note If the cable is moving constantly, such as a boom or hinge construction, the dynamic cable should be used.


SPECIFICATIONS

Cable Diameter	8.7 mm
Cable length	1500 mm
IP Class	IP67
Material	PUR
Temperature range from	-30 °C
Temperature range to	85 °C
Type	Analogue

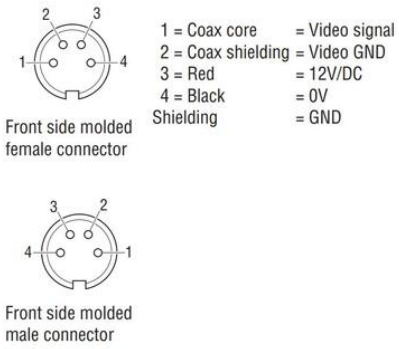

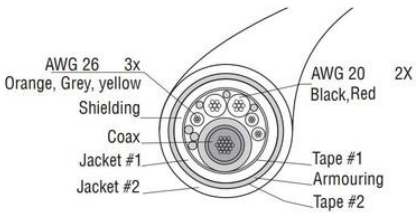


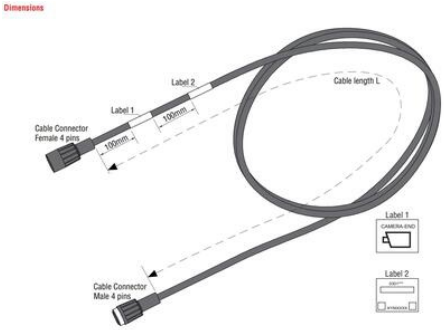




Front side molded
female connector

1 = Coax core	= Video signal
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shielding	= GND



Front side molded
male connector

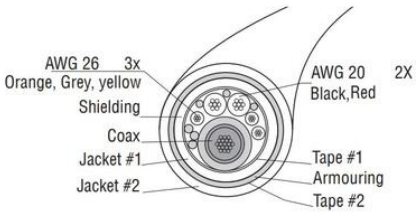

Dimensions

