

## ORLACO - REINFORCED CABLE

ORL0303342

Cable 1,5m Armored 4P Molded Connector

- For electromagnetic compatibility, 100 Vm
- M16 4-pole cast contacts or 7-pin cast contacts
- -30 to +80 °C





### PRODUCT DESCRIPTION


Thanks to the internal reinforcement of galvanized braided steel wire, this cable provides good protection in demanding environments. Note If the cable is moving constantly, such as a boom or hinge construction, the dynamic cable should be used.

### SPECIFICATIONS


<b>Cable Diameter</b>	8.7 mm
<b>Cable length</b>	1500 mm
<b>IP Class</b>	IP67
<b>Material</b>	PUR
<b>Temperature range from</b>	-30 °C
<b>Temperature range to</b>	85 °C
<b>Type</b>	Analogue




1 = Coax core = Video signal  
2 = Coax shielding = Video GND  
3 = Red = 12V/DC  
4 = Black = 0V = GND

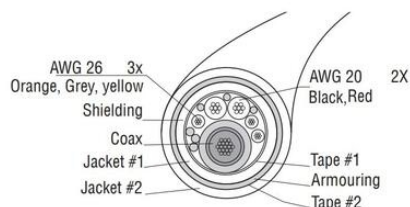


Dimensions

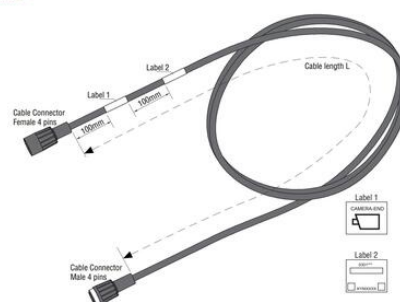




Front side molded female connector

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND



Front side molded male connector

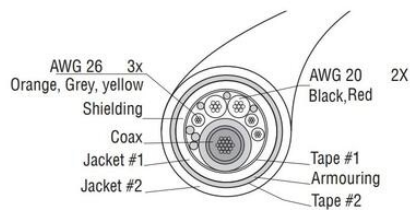

#### Dimensions

