

ORLACO - DYNAMIC-/ MAST CABLE

ORL0304371

Mast cable 0,5m 4P Molded, 4pM - 4pF

- Soft surface with a small bend radius
- M16 4-pole cast contacts or M16 7-pole cast contacts
- -40 to +85 °C





PRODUCT DESCRIPTION

Suitable for use in moving applications, for example, for a gear camera mounted on an arm, a excavator boom or on a truck with a tipping platform. Works well in the mast on your truck.


SPECIFICATIONS

Cable Diameter	9 mm
Cable length	500 mm
IP Class	IP67
Material	PUR
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Analogue



Electrical connection


1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.




Electrical connection


Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimension

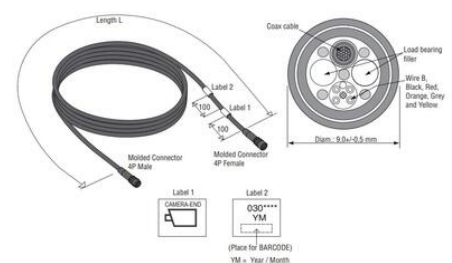


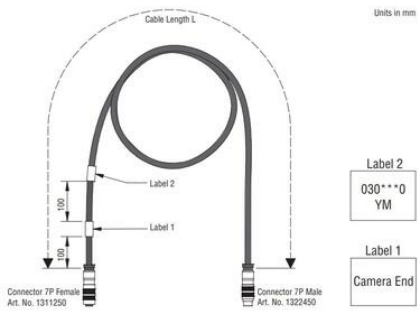

Units in mm

Label 2
030***0
YM

Label 1
Camera End



Front side
4p Male connector



Front side
4p Female connector


Electrical connection

- 1 = coax core Video
- 2 = coax shielding Video GND
- 3 = red 12...30V/DC
- 4 = black 0V
- Orange N.C.
- Yellow N.C.
- Grey N.C.

Electrical connection

Soldering of connectors (female 1311250 + male 1322450)


- 1 = Video
- 2 = Video GND
- 3 = Power input
- 4 = 0V
- 5 = Aux 1
- 6 = Aux 2
- 7 = Aux 3





Solder side
7P Male connector



Solder side
7P Female connector



Dimension

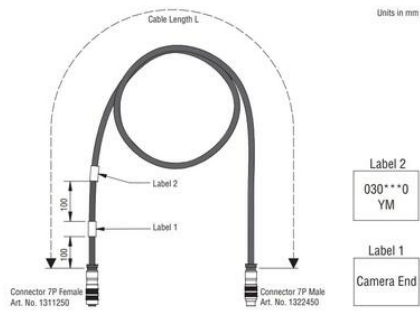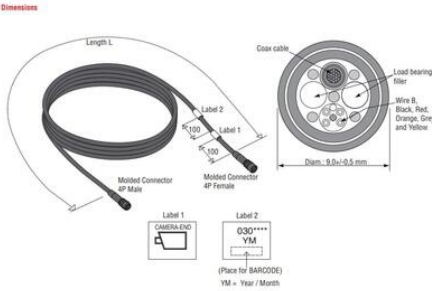

Units in mm

Label 2
030***0
YM

Label 1
Camera End