

## ORLACO - DYNAMIC-/ MAST CABLE

ORL0305341

Mast cable 3,5m 4P Molded, 4pM - 4pF

- Soft surface with a small bend radius
- M16 4-pole cast contacts or M16 7-pole cast contacts
- -40 to +85 °C











### PRODUCT DESCRIPTION

Suitable for use in moving applications, for example, for a gear camera mounted on an arm, a excavator boom or on a truck with a tipping platform. Works well in the mast on your truck.

### SPECIFICATIONS

Cable Diameter	9 mm
Cable length	3500 mm
IP Class	IP67
Material	PUR
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Analogue

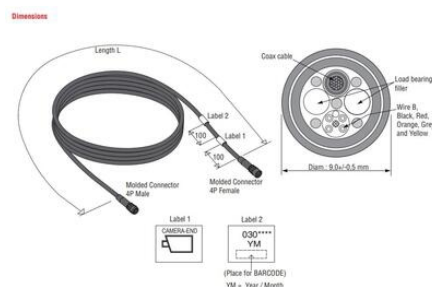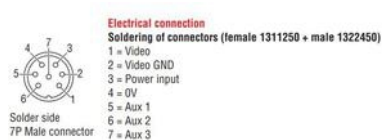


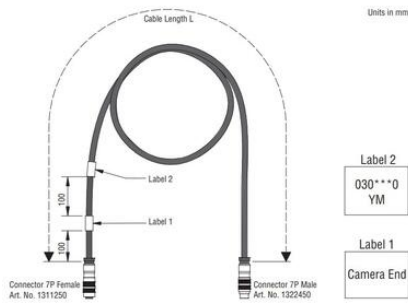

**Electrical connection**


1 = coax core  
2 = coax shielding  
3 = red  
4 = black  
Orange  
Yellow  
Grey

Video  
Video GND  
12...30V/DC  
0V  
N.C.  
N.C.  
N.C.



**Electrical connection**  
**Soldering of connectors (female 1311250 + male 1322450)**

1 = Video  
2 = Video GND  
3 = Power input  
4 = 0V  
5 = Aux 1  
6 = Aux 2  
7 = Aux 3



# Dimensions

