

## ORLACO - MULTI CABLE

ORL0301920

MULTICABLE 16m, 4pM - 4pF

- 4-pole and 7-pole M16 cast contacts
- Developed by Orlaco for best EMC protection
- -40 to +85 °C



### PRODUCT DESCRIPTION


Orlaco develops its own cabling for the best possible image and EMC protection. Molded contacts make them well protected from moisture.

The multi cable is intended for static mounting.

If you would like a cabling to be used for a mobile application, take a look at the range of our Dynamic Cabling.

### SPECIFICATIONS


Cable Diameter	6 mm
Cable length	16000 mm
IP Class	IP67
Material	PVC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Analogue




**Electrical connection**

1 = Coax core	= Video signal
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shielding	= GND


Front side female connector



Front side male connector



Front side molded 7P Female connector





Front side molded 7P Male connector

**Electrical connection**


**molded connectors**

1 = Coax Core	= Video signal
2 = Coax Shield	= Video GND
3 = Red (Power input)	
4 = Black (0V)	
5 = Orange (Rx)	
6 = Yellow (Tx)	
7 = Grey (Aux)	

**Dimensions**

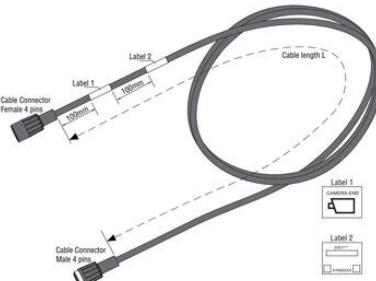


Front side female connector



Front side male connector

**Electrical connection**

1 = Coax core	= Video signal
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shielding	= GND




Front side molded 7P Female connector



Front side molded 7P Male connector

**Dimensions**

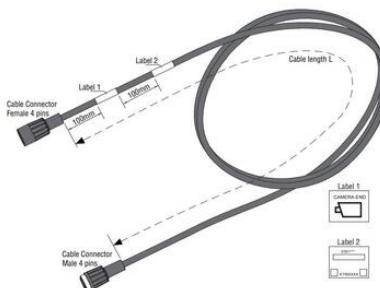

Front side female connector



Front side male connector