

ORLACO - MULTI CABLE

ORL0301960
MULTICABLE 1M, 4pM - 4pF

- 4-pole and 7-pole M16 cast contacts
- Developed by Orlaco for best EMC protection
- -40 to +85 °C




PRODUCT DESCRIPTION

Orlaco develops its own cabling for the best possible image and EMC protection. Molded contacts make them well protected from moisture. The multi cable is intended for static mounting.

If you would like a cabling to be used for a mobile application, take a look at the range of our Dynamic Cabling.

SPECIFICATIONS

Cable Diameter	6 mm
Cable length	1000 mm
IP Class	IP67
Material	PVC
Temperature range from	-40 °C
Temperature range to	85 °C
Type	Analogue



Front side
female connector


Electrical connection

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND





Front side
male connector


Dimensions



Front side molded
7P Male connector

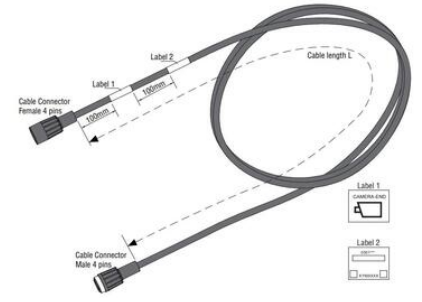


Front side
female connector




Front side
male connector



Front side molded
7P Female connector



Front side molded
7P Male connector



Dimensions

