ORLACO

CPH AMOS

ORL0199700
Camera AMOS CPH 51° PAL




- 12 V DC
- IP69K
- Shockproof and vibration resistant
- New AMOS sensor

PRODUCT DESCRIPTION

Orlaco's pinhole camera (CPH) is perfect for use when, for example, you can not mount a camera on the fork. Since the camera has small dimensions (55x28 mm) it can be placed very easily below the fork carrier. Also works very well as mid-range camera. Due to the robust construction of the camera, it is advisable to use the camera as a tool camera, for example, on the stick of a excavator.

SPECIFICATIONS


Cable length	600 mm
Camera Angle	51
Image Format	PAL
IP Class	IP68, IP69K
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Vibration Resistance	50G




Front side 4p molded male connector

Electrical connections

1 = Coax core	= video
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shield	= GND

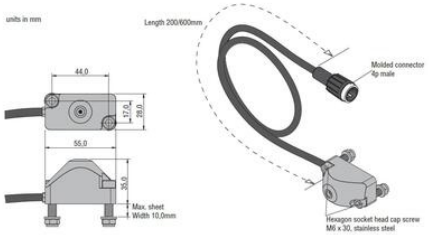




Front side 4p molded male connector

Electrical connections

1 = Coax core	= video
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shield	= GND

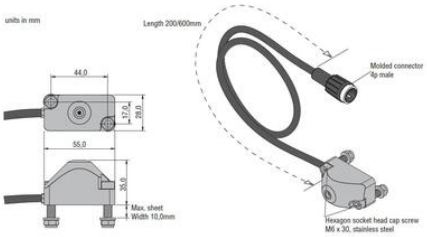
units in mm
Length 200/600mm
Molded connector
4p male
44.0
17.0
20.0
56.0
30.0
Max. sheet
Width 10,0mm
Hexagon socket head cap screw
M6 x 30, stainless steel