

CPH AMOS

ORL0199710

Camera AMOS CPH 51° PAL 0.2B

- 12 V DC
- IP69K
- Shockproof and vibration resistant
- New AMOS sensor






PRODUCT DESCRIPTION


Orlaco's pinhole camera (CPH) is perfect for use when, for example, you can not mount a camera on the fork. Since the camera has small dimensions (55x28 mm) it can be placed very easily below the fork carrier. Also works very well as mid-range camera. Due to the robust construction of the camera, it is advisable to use the camera as a tool camera, for example, on the stick of a excavator.

SPECIFICATIONS

Cable length	200 mm
Camera Angle	51
Image Format	PAL
IP Class	IP68, IP69K
Supply Voltage DC Max	24 V DC
Supply Voltage DC Min	12 V DC
Temperature range from	-40 °C
Temperature range to	85 °C
Vibration Resistance	50G

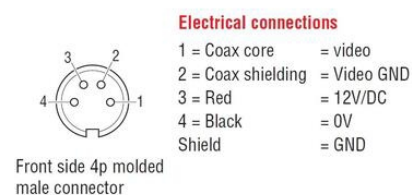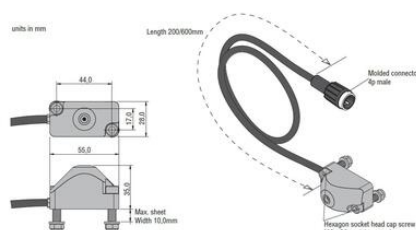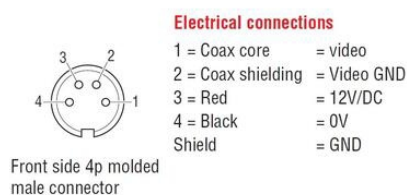

units in mm



Length 200/600mm

