


SLIDING DOORS

10002440

Door kit, sliding door single, without upper support

- Single or double versions
- Compatible with ProSafe T10, OptiSafe and SolidSafe panels
- Same type for left- and right-handed doors

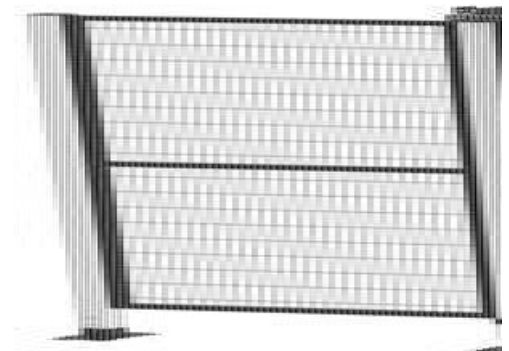

PRODUCT DESCRIPTION

The door kit selection offers door widths for multiple applications. Most common widths for example for ProSafe T10 are 700, 800, 1000, 1200 and 1500 mm.

SLIDING DOORS




Space required: door- 60 mm

Double sliding door (max. 3000mm)



Space required: door - 60 mm

Sliding door without upper support



Suitable for use with fence systems of all heights in areas, where free access for forklift etc. is required.

Double version also available.

SPECIFICATIONS

Width max	1500 mm
-----------	---------

