

REFLEX - HIGH POWERED PHOTOELECTRIC SENSORS AND AMPLIFIERS

OEM202N230A Photosensor amp 230VAC NPN and relay


- Small photoelectric sensors with long distances
- Able to withstand dirty environments
- Amplifier with timer function
- Amplifier with one or two channels



PRODUCT DESCRIPTION

SPECIFICATIONS

Electrical connection	11-pole base
Light / Dark Switching	Yes
Material of body	ABS plastic
Operating Voltage AC Max	230 V AC
Operating Voltage AC Min	230 V AC
Power Consumption	2.8 W
Reaction time	65 ms
Temperature range from	-20 °C
Temperature range to	60 °C

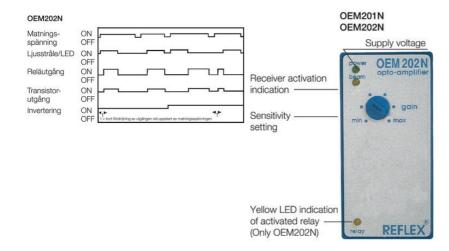

REFLEX®

