

## REFLEX - HIGH POWERED PHOTOELECTRIC SENSORS AND AMPLIFIERS

OEM202N24AD

Photosensor amp 24VAC/DC NPN and relay

- Small photoelectric sensors with long distances
- Able to withstand dirty environments
- Amplifier with timer function
- Amplifier with one or two channels




### PRODUCT DESCRIPTION

### SPECIFICATIONS

Electrical connection	11-pole base
Light / Dark Switching	Yes
Material of body	ABS plastic
Operating Voltage AC / DC Max	24 V
Power Consumption	2.8 W
Reaction time	65 ms
Supply Voltage AC / DC Min	24 V
Temperature range from	-20 °C
Temperature range to	60 °C

#### OEM202N

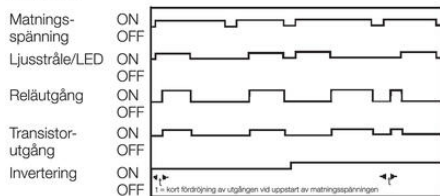

Receiver activation  
indication

Sensitivity  
setting

Yellow LED indication  
of activated relay  
(Only OEM202N)

#### OEM201N OEM202N

