

## REFLEX - HIGH POWERED PHOTOELECTRIC SENSORS AND AMPLIFIERS

OEM207N230A  
AMPLIFIER 230VAC MULTIPLEX

- Small photoelectric sensors with long distances
- Able to withstand dirty environments
- Amplifier with timer function
- Amplifier with one or two channels




### PRODUCT DESCRIPTION

### SPECIFICATIONS

Electrical connection	11-pole base
Light / Dark Switching	Yes
Material of body	ABS plastic
Operating Voltage AC Max	230 V AC
Operating Voltage AC Min	230 V AC
Power Consumption	2.8 W
Reaction time	33 ms
Temperature range from	-20 °C
Temperature range to	60 °C

#### OEM207N

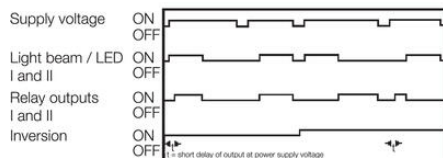

Sensitivity setting canal 1

Light/dark K1  
Light/dark K2

Sensitivity setting canal 2  
Output indication canal 2

#### OEM207N

Output indication canal 1

