

REFLEX - HIGH POWERED PHOTOELECTRIC SENSORS AND AMPLIFIERS

OEM207N24AD
AMPLIFIER 24VDC MULTIPLEX

- Small photoelectric sensors with long distances
- Able to withstand dirty environments
- Amplifier with timer function
- Amplifier with one or two channels




PRODUCT DESCRIPTION

SPECIFICATIONS

Electrical connection	11-pole base
Light / Dark Switching	Yes
Material of body	ABS plastic
Operating Voltage AC / DC Max	24 V
Power Consumption	2.8 W
Reaction time	33 ms
Supply Voltage AC / DC Min	24 V
Temperature range from	-20 °C
Temperature range to	60 °C

OEM207N

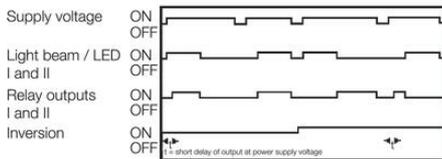

OEM207N

