

DATALOGIC - DS2 - AREA LIGHT CURTAIN SENSORS WITH BOTH DIGITAL AND ANALOGUE OUTPUT

DS2-05-07-015-JV
957501040 Light Grid Array H = 150mm
RS485/Analogue/1 PNP

- Measurement heights from 150 to 2500 mm
- Resolution down to 12 mm
- Distance up to 10 m between the transmitter / receiver
- Programmed via DIP-switch or PC






PRODUCT DESCRIPTION

The DS2 Curtains are suitable for automatic materials handling. The curtains have both a PNP output and an analogue 0-10V output. Models are available with RS485 port or Ethernet. Settings can be made using Dipswitches on the curtains or via software on a PC.




SPECIFICATIONS

Absolute measurement accuracy	6 mm
Approvals	CE, cULus
Detection Height	147 mm
Dimension (mm)	35 mm x 40 mm x 256 mm
Distance Max	5000 mm
Distance Min	300 mm
Electrical connection	M12 8 pole connector, M12 4 pole connector
IP Class	IP65
LED indicator	Yes
Lens material	PMMA
Light type	IR LED
Material of body	Aluminium
Output	0-10V, PNP
Output current max	0.1 A
Photocell technology	Curtain photocell

Power consumption max	0.25 A
Reaction time	5.5 ms
Relative measurement accuracy	±6 mm
Supply voltage	24 V DC
Temperature range bearing, from	-25 °C
Temperature range bearing, to	70 °C
Temperature range from	0 °C
Temperature range to	50 °C

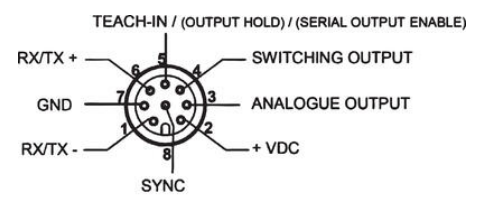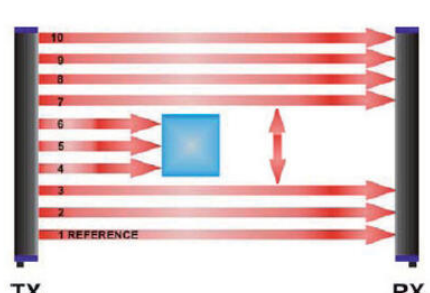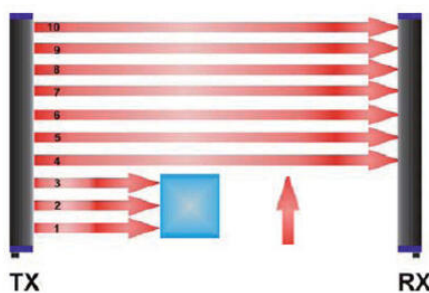

- Main connector: M12 8-pole connector
- 1 = white = RX/TX -
 - 2 = brown = +VDC
 - 3 = green = ANALOGUE OUT
 - 4 = yellow = SWITCHING OUTPUT
 - 5 = grey = TEACH-IN / (OUT HOLD) / (SERIAL OUT ENABLE)
 - 6 = pink = RX/TX +
 - 7 = blue = GND
 - 8 = red = SYNC

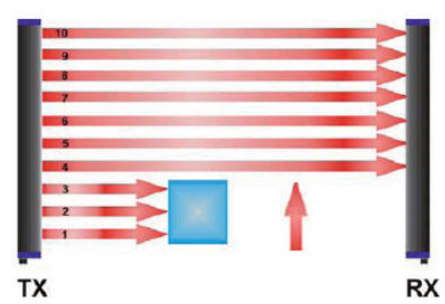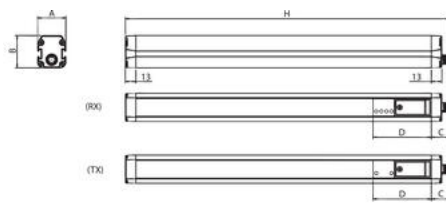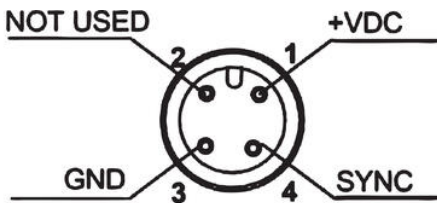



Main connector: M12 4-pole connector

- 1 = brown = +VDC
- 2 = white = NOT USED
- 3 = blue = GND
- 4 = black = SYNC

MODEL	A x B (mm)	h (mm)	C (mm)	D (mm)
DS2-05-07-015-XX	35 x 40	256	23.8	72.5
DS2-05-07-030-XX	35 x 40	403	23.8	72.5
DS2-05-07-045-XX	35 x 40	550	23.8	72.5
DS2-05-07-060-XX	35 x 40	697	23.8	72.5
DS2-05-07-075-XX	35 x 40	844	23.8	72.5
DS2-05-07-090-XX	35 x 40	991	23.8	72.5
DS2-05-07-105-XX	35 x 40	1138	23.8	72.5
DS2-05-07-120-XX	35 x 40	1285	23.8	72.5
DS2-05-07-135-XX	35 x 40	1432	23.8	72.5
DS2-05-07-150-XX	35 x 40	1579	23.8	72.5
DS2-05-07-165-XX	35 x 40	1726	23.8	72.5
DS2-05-25-045-XX	35 x 40	562	23.8	72.5
DS2-05-25-060-XX	35 x 40	713	23.8	72.5
DS2-05-25-075-XX	35 x 40	864	23.8	72.5
DS2-05-25-090-XX	35 x 40	1015	23.8	72.5

XX: JV for serial models or JE for Eth ERNET models

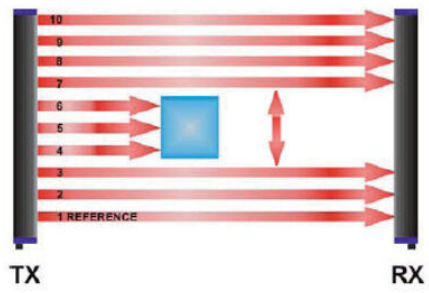

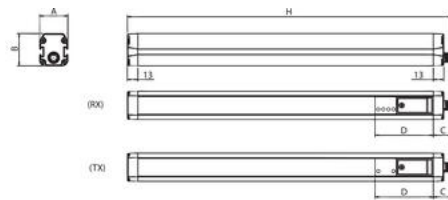

MODEL	A x B (mm)	h (mm)	C (mm)	D (mm)
DS2-05-07-015-XX	35 x 40	256	23.8	72.5
DS2-05-07-030-XX	35 x 40	403	23.8	72.5
DS2-05-07-045-XX	35 x 40	550	23.8	72.5
DS2-05-07-060-XX	35 x 40	697	23.8	72.5
DS2-05-07-075-XX	35 x 40	844	23.8	72.5
DS2-05-07-090-XX	35 x 40	991	23.8	72.5
DS2-05-07-105-XX	35 x 40	1138	23.8	72.5
DS2-05-07-120-XX	35 x 40	1285	23.8	72.5
DS2-05-07-135-XX	35 x 40	1432	23.8	72.5
DS2-05-07-150-XX	35 x 40	1579	23.8	72.5
DS2-05-07-165-XX	35 x 40	1726	23.8	72.5
DS2-05-25-045-XX	35 x 40	562	23.8	72.5
DS2-05-25-060-XX	35 x 40	713	23.8	72.5
DS2-05-25-075-XX	35 x 40	864	23.8	72.5
DS2-05-25-090-XX	35 x 40	1015	23.8	72.5

XX: JV for serial models or JE for Eth ERNET models