

FIEPOS EFUSE

3x 380-480 V AC/24-28 V DC, 300 or 500 W

FPT500.245-018-103

IP65/IP67 Power supply 3x380-480 V AC/24 V DC, 500 W

- IP54 or IP65/IP67
- Up to 4 switchable outputs
- Output power 360/600 W
- 600/1000 Wpeak 5s
- IP54



PRODUCT DESCRIPTION

The FPT300 is an industrial grade power supply for 3-phase networks incorporated in a rugged wall-mount housing with IP54 protection.

It provides two to four stabilized outputs that are galvanically separated from the input.




The negative potential of the outputs is permanently connected to PE within the unit.

The most outstanding features of the FPT series are the compact size, the wide operational temperature range, the extremely low input inrush current and the very high efficiencies, which are achieved by various design technologies.

SPECIFICATIONS

Number of phases	3
Input voltage AC	380-480
Input voltage ac min	323 V AC
Input voltage ac max	552 V AC
Inrush current at 400 V ac typical	2 A
Power Factor at 400 V AC, full load. Typical	0.94
Supply Frequency	50-60 Hz ±6 %
Power consumption at 400 V ac	0.8 A
Output voltage	24 V DC
Output voltage min	24 V DC
Output voltage max	28 V DC
Output Current	20.8 A

Output current max	41.7 A
Max. Current per output	10 A
Effect	500 W
Total output power <+45°C	600 W
Total output power <+55°C	500 W
Total output power <+70°C	350 W
Total output power <5 s, <+55°C	1000 W
Total output power <5 s, <+70°C	700 W
Power drop from +55 °C to + 70 °C	10 W/°C
Ripple. max	100 mV pp
Temperature Range Without Derating From	-25 °C
Temperature Range Without Derating To	55 °C
Back-feeding loads	35V / 4 J
Efficiency At 400 V AC. Typical	94.2 %
Efficiency At 400 V AC, full load. Typical	95.8 %
Lifetime at 400 V ac, full load and +40 ° C	43000 h
MTBF (IEC 61709) 400 V ac, max loan, +40 °C	253000 h
Width	182 mm
Height	183 mm
Depth	59 mm
Weight	1.2 kg
Output connectors	2x 7/8"
DC-OK/IO-link connector	M12-A
Input connector	M12-S
Series	FIEPOS eFuse
Approvals	CB, CE, cULus
DC relay output	No
IO-LINK	Yes
Material Protection	Aluminium
Hold-up time at 400 V AC, full load. Typical.	24 ms
IP Class	IP65, IP67
Active Transient	Yes

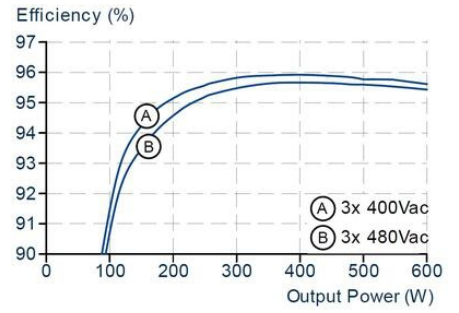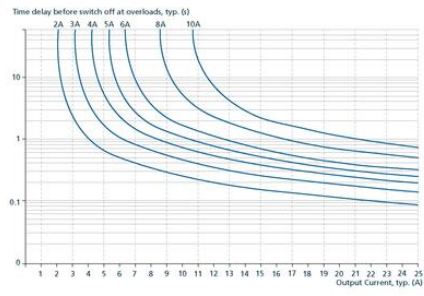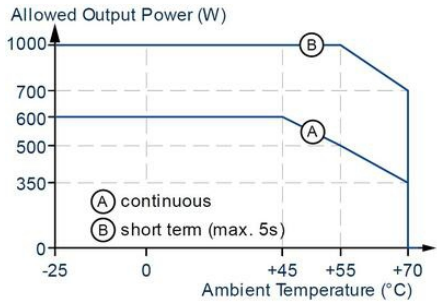

- A. Input Connector
- B. Output Connectors
- C. IO Link Connector
- D. Status LED
- E. LED Bar
- F. Set Mode and Up and Down Button
- G. Output LEDs ON/OFF & Reset Buttons

