

POWER SUPPLY 1-PHASE, 24 V DC PIANO SERIES

PIC120.241C

Powersupply 230VAC 24VDC/5A DC OK

- Output current of 5 A
- Up to 90.5% efficiency
- Only 39 mm wide
- Very affordable
- DC OK relay output



PRODUCT DESCRIPTION

Pulse Piano Series is very compact unit that meets the essential industrial demands of today's applications. With the excellent relationship between price and performance gives Piano Series new opportunities without compromising on quality or reliability.

Life expectancy is remarkably high compared to similar products on the market. The long lifetime is achieved through the efficient and sophisticated thermal design, but also through the sole use of detailed quality components. The unit has a MTBF values over 1.7 million hours and a service life of 47,000 hours at 40 ° C.

The powerful house of molded polycarbonate with a clever circuit design and low weight gives great advantages in shock- and vibration-rich environments. In addition, the units very little space in the cabinet and gives a stylish impression.

PIC120.241C the DC-OK relay outputs for status indication of 24 V DC.


Many industrial applications require no more clamping alternative, the reduction of the input voltage is only 230 V AC circuits simplifies and gives significant cost advantages.

A global version of the 115/230 V AC is available, PIC120.241D, for applications where multi voltage required.

TECHNICAL DATA


| Input | |
|--|---------------|
| Supply voltage AC | 180-264 V AC |
| Supply voltage DC | Not available |
| Power consumption at 230 V AC | 1.12 A |
| Supply frequency | 47-63 Hz |
| Holding time at 230 V AC | 33 ms |
| Protection from mains transients VDE0160 | Yes |
| Output | |
| Output voltage, adjustable | 24-28 V DC |

| | |
|--|--|
| Load regulation 0 A to max load | 150 mV |
| Voltage regulation | 10 mV |
| Ripple | Max. 100 mVpp |
| Output current, nominal | 5 A (120 W) |
| Max short circuit | See diagram below |
| Other data | |
| Efficiency at 230 V AC/max. load | 90.5 % |
| Power loss 230 V AC/max. load | 12.6 W |
| Power loss at 0 A No load current | 0.6 W |
| Cable connections | Screw connection |
| Cable size stranded | 0.5-4 mm ² |
| Working temperature without power reduction | -10 to +55 °C |
| Power reduction over +55 to +70 °C | 3 W/°C |
| IP Class | IP20 |
| MTBF (IEC 61709) 230 V AC, Max. load, +40 °C | 1 720 000 h |
| Shock and vibration | 30 g 6 ms / 20 g 11 ms |
| Approvals | UL60950-1, UL508 Listed |
| EMC | EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4 Class B |
| Compliant standards | EN60950-1, EN60204-1, EN50178, IEC62103, IEC60364-4-41 |

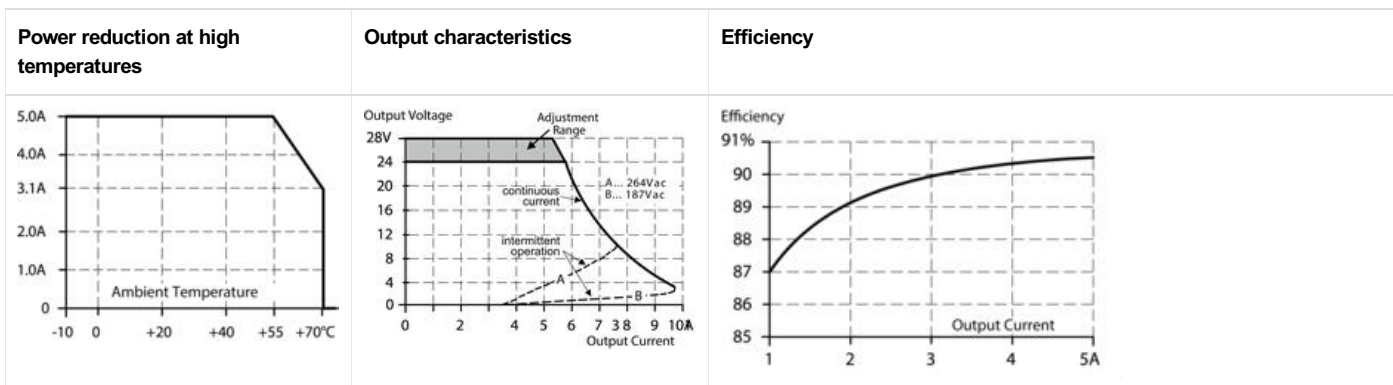

DIMENSIONS

| | |
|-------|------|
| Front | Side |
|-------|------|

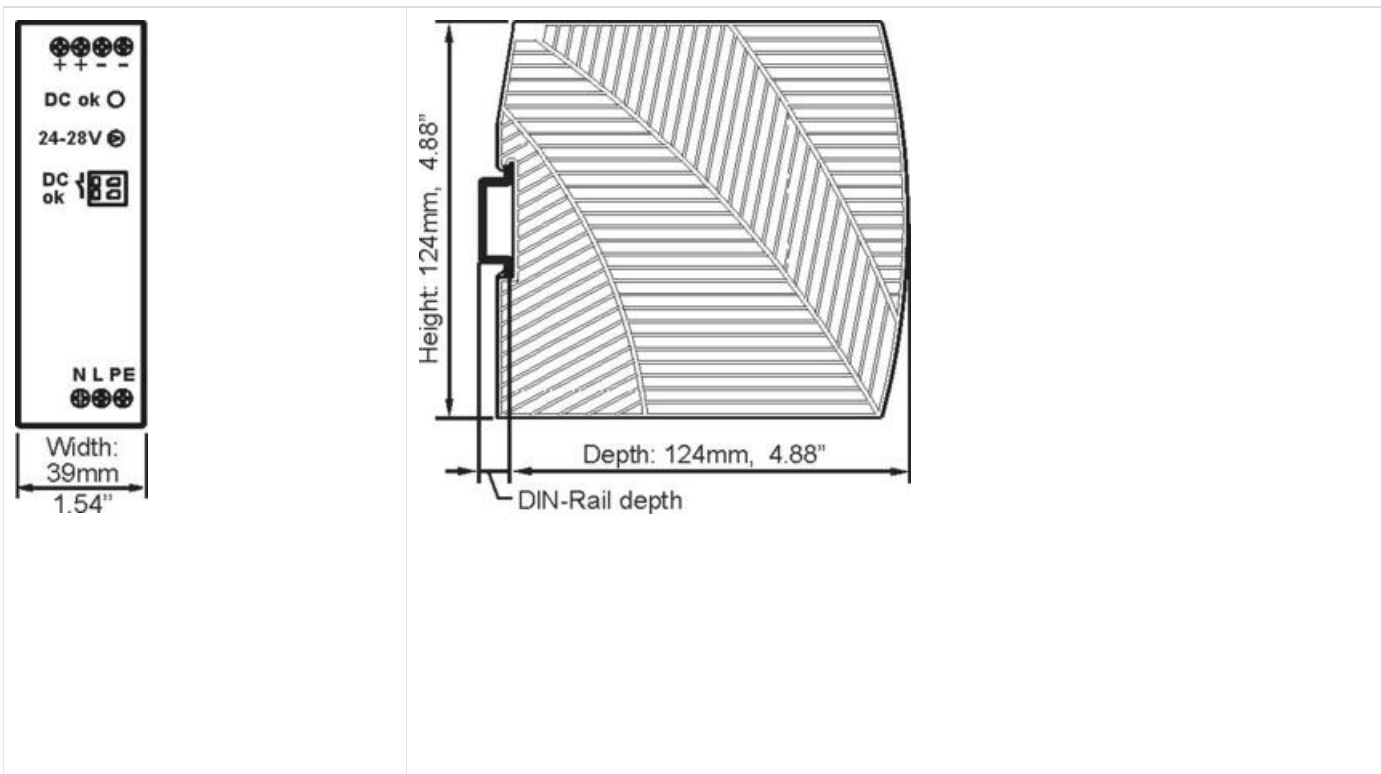

For good cooling recommended free space of 40 mm above and 20 mm below the unit. Pages 5 mm when the unit is charged continuously with more than 50% of the rated current. Increase the distance to 15 mm on nearby products emit heat.

WIRING

| | |
|---|---|
| <p>The front panel of the power supply unit features the following components from top to bottom: AC input terminals labeled '+ + - -' and 'A'; a 'DC 24V 5A' label; a 'DC ok' indicator light labeled 'D'; a '24-28V' potentiometer labeled 'C'; a 'DC ok' label above two relay terminals labeled '13' and '14', with 'E' pointing to the relay; the 'PULS PIANO' logo; the model 'PIC 120.241C Power Supply'; and AC output terminals labeled 'N L' and '⊕'.</p> | A = Primary side. 230 V AC |
| | B = Secondary side. 24-28 V DC |
| | C = Potentiometer for voltage output |
| | D = DC-OK Led. Lights green when the output voltage is over 18 V DC |
| | E = OD-OK output relay (PIC120.241C) |

PART NUMBERS

| Order number | Input voltage | Output data |
|--------------|---------------|------------------|
| PIC120.242C | 180-264 V AC | 24-28 V DC / 5 A |

| | | |
|-------------|----------------------|--------------------------------------|
| PIC120.241C | 180-264 V AC | 24-28 V DC / 5 A. DC-OK output relay |
| PIC120.241D | 100-120/200-240 V AC | 24-28 V DC / 5 A. DC-OK output relay |

SPECIFICATIONS

| | |
|---|------------|
| Number of phases | 1 |
| Input voltage AC | 200-240 V |
| Input voltage ac min | 180 V AC |
| Input voltage ac max | 264 V AC |
| Inrush current at 230 V ac typical | 28 A |
| Power Factor at 230 V AC, full load. Typical | 0.54 |
| Supply Frequency | 50-60 ±6 % |
| Power Consumption At 230 V AC | 1.06 A |
| Type Power Supply | AC-DC |

| | |
|--|-----------|
| Output voltage | 24 V DC |
| Output voltage min | 24 V DC |
| Output voltage max | 28 V DC |
| Output Current | 5 A |
| Effect | 120 W |
| Power Reduction Of 60 To 70 ° C | 3 W/°C |
| Ripple. max | 100 mV pp |
| Temperature Range Without Derating From | -10 °C |
| Temperature Range Without Derating To | 55 °C |

| | |
|--|-----------|
| Efficiency At 230 V AC. Typical | 89.5 % |
| Efficiency At 230 V AC, full load. Typical | 90.5 % |
| Lifetime at 230 V ac, full load and +40 ° C | 47000 h |
| MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C | 1720000 h |

| | |
|---------------|---------|
| Width | 39 mm |
| Height | 124 mm |
| Depth | 124 mm |
| Weight | 0.35 kg |

| | |
|---|--------------------------|
| Clamp type | Screw |
| Series | Piano |
| Approvals | CB, CE, cRUus, cULus, GL |
| DC relay output | Yes |
| Material Protection | Polycarbonate |
| Hold-up time at 230 V AC, full load. Typical. | 33 ms |
| IP Class | IP20 |

