



## CAL 9500P

95001PA408

PROG.REG.IN:STD,UT:SSD/RELÄ

- PID controller equipped with bright LED display
- Display indicates default and measured values
- Easy to program
- 3 outputs by default
- Analog input and output options available






### PRODUCT DESCRIPTION


### SPECIFICATIONS

|                                   |                       |
|-----------------------------------|-----------------------|
| Approvals                         | CE, CSA, EMC, UL, FM  |
| Digit Height                      | 10 mm                 |
| Digital signal in                 | No                    |
| Frequenze                         | 50-60 Hz              |
| IP Class                          | IP66                  |
| Material Protection               | Polycarbonate         |
| Mounting                          | Panel mount           |
| Number Of Digits                  | 4                     |
| Output                            | Logic (SSR), 2x Relay |
| Panel size                        | 48x48 mm              |
| Power Supply AC max               | 264 V                 |
| Power Supply AC min               | 90 V                  |
| Temperature resistance housing to | 50 °C                 |
| Weight                            | 180 g                 |


Set-point

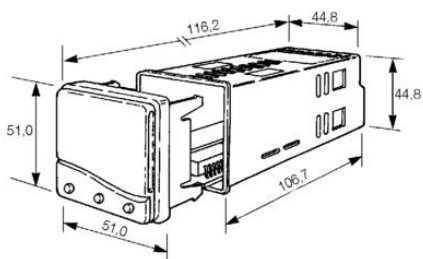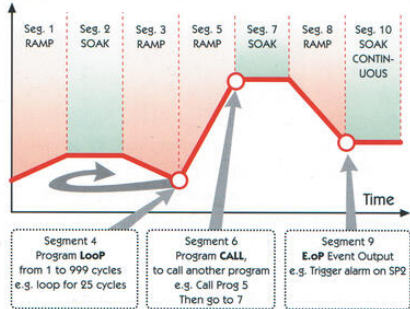


Modellbeteckningar  
95111




95001




95221



95B11 = 4-20mA  
95C11 = 0-5V  
95D11 = 0-10V






95B21 = 4-20mA  
95C21 = 0-5V  
95D21 = 0-10V

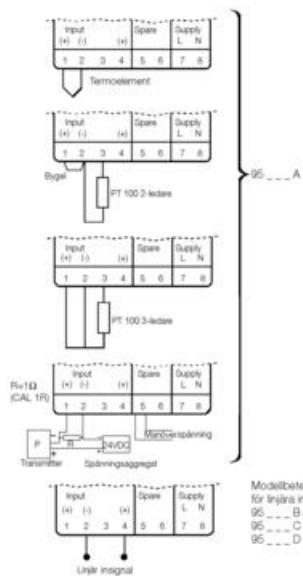


Modellbeteckningar  
för linjära insignal  
95...B = 4-20mA  
95...C = 0-5V  
95...D = 0-10V

Set-point

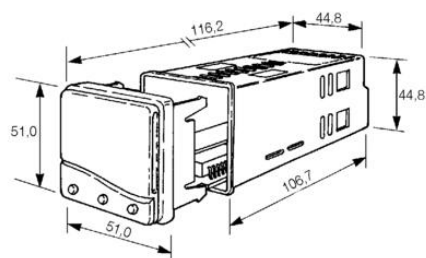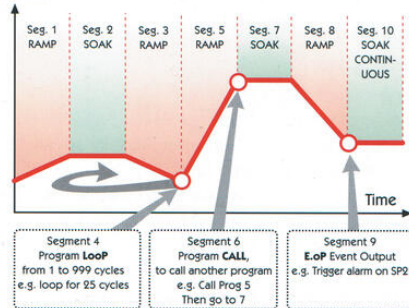





Modellbeteckningar  
95111




95001




95221



95B11 = 4-20mA  
95C11 = 0-5V  
95D11 = 0-10V



95B21 = 4-20mA  
95C21 = 0-5V  
95D21 = 0-10V

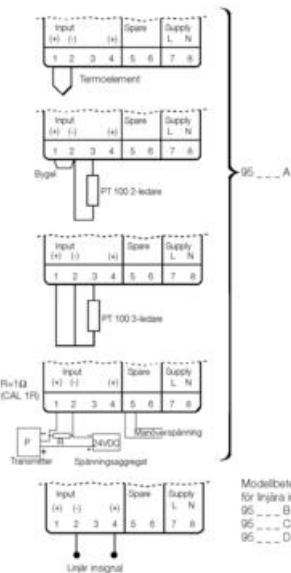

Modellbeteckningar  
för ljåra insignal  
95... B = 4-20mA  
95... C = 0-5V  
95... D = 0-10V