



CAL 9500P

95B.11PB000

CAL9500P, 4-20 mA input, 4-20 mA + 2 x relay output

- PID controller equipped with bright LED display
- Display indicates default and measured values
- Easy to program
- 3 outputs by default
- Analog input and output options available






PRODUCT DESCRIPTION


SPECIFICATIONS

Approvals	CE, CSA, EMC, UL, FM
Digit Height	10 mm
Digital signal in	No
Frequenze	50-60 Hz
IP Class	IP66
Material Protection	Polycarbonate
Mounting	Panel mount
Number Of Digits	4
Panel size	48x48 mm
Power Supply AC max	264 V
Power Supply AC min	90 V
Temperature range from	0 °C
Temperature range to	50 °C
Weight	180 g


Set-point

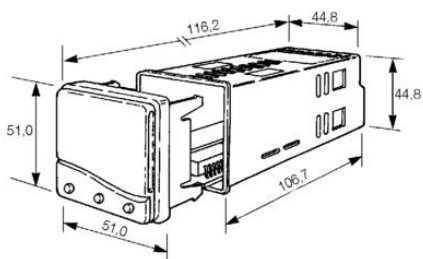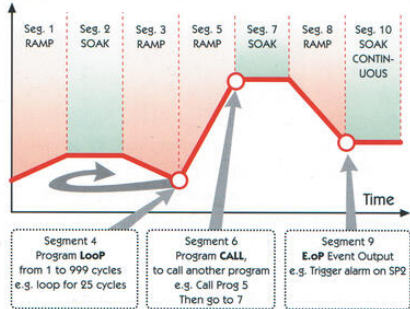


Modellbeteckningar
95111




95001




95221



95B11 = 4-20mA
95C11 = 0-5V
95D11 = 0-10V






95B21 = 4-20mA
95C21 = 0-5V
95D21 = 0-10V

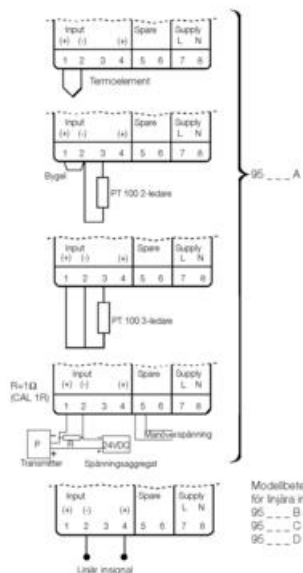


Modellbeteckningar
för linjära insignal
95...B = 4-20mA
95...C = 0-5V
95...D = 0-10V

Set-point

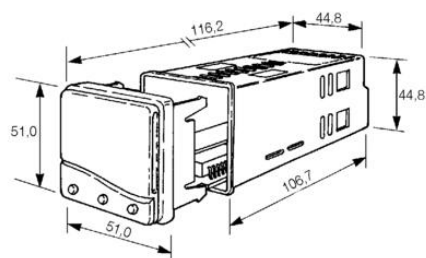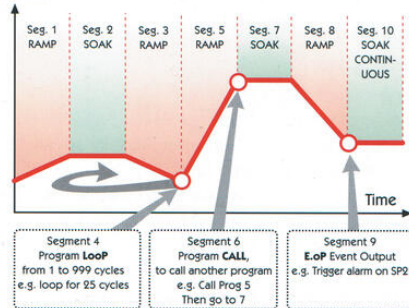





Modellbeteckningar
95111




95001




95221



95B11 = 4-20mA
95C11 = 0-5V
95D11 = 0-10V



95B21 = 4-20mA
95C21 = 0-5V
95D21 = 0-10V

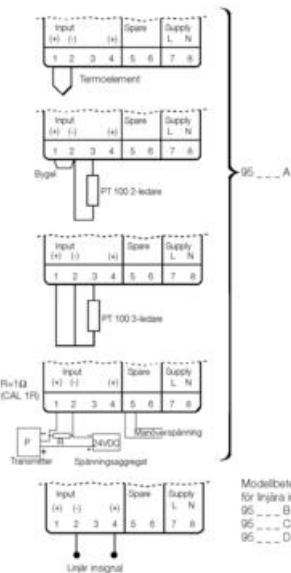

Modellbeteckningar
för ljåre insignal
95... B = 4-20mA
95... C = 0-5V
95... D = 0-10V