

DATALOGIC - VISION SENSOR DATAVS2 AOR

DATAVS2-06DEAOR
Vision sensor 6mm lens advance

- 360° pattern recognition
- 8 different controls
- Memory for up to 20 different inspections
- 4 outputs



PRODUCT DESCRIPTION

DataVS2 is a series of Vision sensors for flexible solutions for machine applications.

The sensor is complete with optics, red LED lighting and electronics in a compact housing. The parameters in the sensor are set via PC through Ethernet communication. The software comes with the sensor and is developed to lead the user step by step through parameter setting. DataVS2 is available in three different versions with different control instruments.

Advanced Object recognition AOR - Has a control instrument for 360° pattern recognition.

.Logic functions for that are connected between different control instruments and outputs such as: AND, OR, NOT, NAND, NOR etc.



TECHNICAL DATA



Supply voltage	24 V DC \pm 10 %
Ripple	1Vpp max. with lighting 2Vpp without lighting
Current consumption	100 mA at 24 VDC (without lighting)
Output type	4 PNP
Output current	100 mA max.
Resolution	640x480 (VGA)
Network interface	M12 4-pole Ethernet 10/100 Mbs
Interface external lighting	Strobe signal (24 V PNP N.O)
Frame rate	60 fps
optics	integrated (6 mm/8 mm/12 mm/16 mm)

Indication	4 LED
Connection	M12 8-pole A-coded M12 4-pole D-coded
IP-class	IP50
Encapsulation material	Aluminium alloy/ABS
Weight	125 g
Working temperature	-10 to +50 °C
Storage temperature	-25 to +70 °C

CONTROL INSTRUMENTS




Control	Function	Applications	Image
Pattern Match	Search for a sample within a specified range	<ul style="list-style-type: none"> • Packaging: check of logo • Installation: product-orientation • Automation of post: stamp control 	
Contour Match	Control of form	<ul style="list-style-type: none"> • Metal working: integrity check • Foodstuffs: control of form 	
Position	Control of limit position of the object	<ul style="list-style-type: none"> • Bottling: level control • Foodstuffs: control of label position 	
Width	Measures the object's width	<ul style="list-style-type: none"> • Installation: control of plastic parts • Woodworking industry: measurement of branch thickness 	
Counting	Counts number of objects along a line	<ul style="list-style-type: none"> • Electronics: counting components • Pharmaceutical industry: Counting units 	

Contrast	Calculation of contrast	<ul style="list-style-type: none"> • Foodstuffs: checking presence of date and consignment label • Metal working: Check of laser marking 	
Brightness	Calculation of luminance	<ul style="list-style-type: none"> • Bottling: checking presence of cap • Packaging: counting objects 	


READ FIELD

Read field

Working distance (mm)	Read field (Width x Height) in mm			
	DATAVS2-16-DE-xxx	DATAVS2-12-DE-xxx	DATAVS2-08-DE-xxx	DATAVS2-06-DE-xxx
50	-	17 x 12	25 x 20	42 x 30
80	-	25 x 20	40 x 30	60 x 41
110	-	33 x 25	55 x 40	80 x 55
140	31 x 24	45 x 35	70 x 50	98 x 69
170	39 x 29	53 x 38	85 x 60	118 x 83
200	46 x 34	60 x 50	100 x 70	138 x 92
300	70 x 53	90 x 65	145 x 103	201 x 140
400	94 x 71	121 x 82	186 x 132	265 x 189
500	118 x 89	150 x 110	236 x 167	330 x 232
600	143 x 107	185 x 130	282 x 232	385 x 270

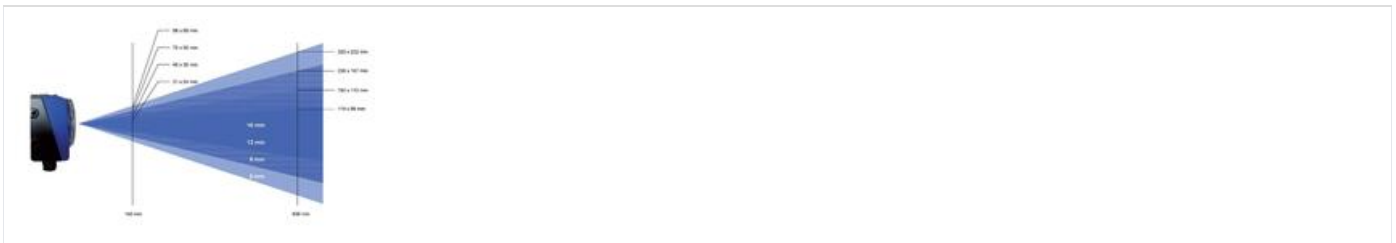

DIMENSIONS

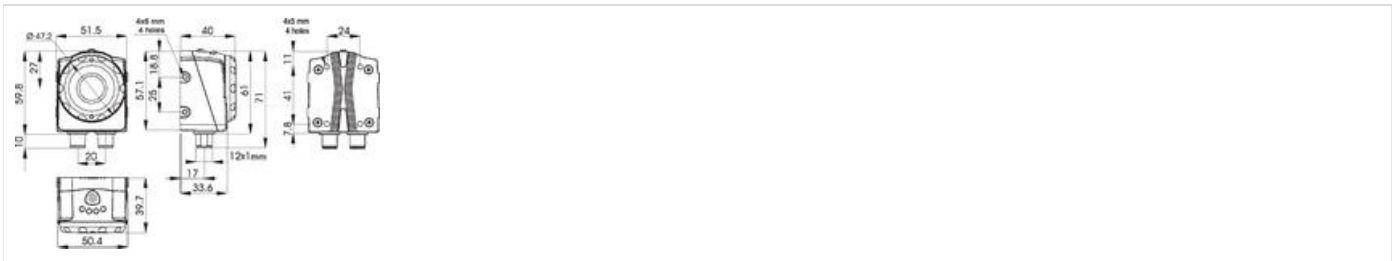

CONNECTION



ORDER NUMBER

Order number	Description	Output
DATAVS2-06DEAOR	6 mm lens, AOR	4 outputs
DATAVS2-08DEAOR	8 mm lens, AOR	4 outputs
DATAVS2-12DEAOR	12 mm lens, AOR	4 outputs
DATAVS2-16DEAOR	16 mm lens, AOR	4 outputs
DATAVSCVRJ45D03	Ethernet cable 3m	

DOWNLOAD


Data sheet	Download
Manual	Download

SPECIFICATIONS


Electrical connection	M12 4 pole D-coded, M12 8 pole connector
Frame Rate	60
IP Class	IP50
Lens material	ABS plastic
Material Protection	Aluminium
Output	4xPNP
Output current max	0.1 A
Power consumption max	0.1 A
Temperature range from	-10 °C
Temperature range to	50 °C

Voltage DC max	24 V
Voltage DC min	24 V
Voltage Tolerance	10%


The Advanced Object Recognition (AOR) models integrate new important functionalities, including:




360° Pattern Match Locator
Object detection independent from rotations.




Logical tools
Possibility to combine the results of the single tools through boolean operator (AND, OR, NOT, etc.)



Advanced Ethernet
Current inspection results available also on Ethernet communication.



Speed-up
High execution speed thanks to the management of reduced resolution and TURBO mode.

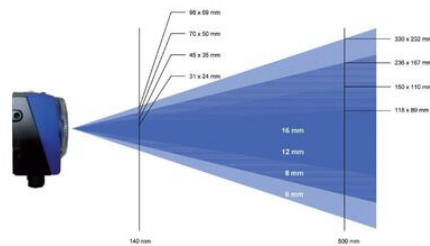

360° Pattern match

The Advanced Object Recognition (AOR) models include all the controls and locators available on Object Recognition models as well as the new 360° Geometric Pattern Match Locator.

Step 1: Image Setup



The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorize the image that will be used as a template during sensor functioning.

Step 2: Teach



The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry-out.

Step 3: Run




The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnostics.

M12 4-pole Ethernet




PIN 1 = white/orange = RX+
PIN 2 = white/green = TX+
PIN 3 = orange = RX-
PIN 4 = green = TX-

M12 8-pole (power supply and I/O)



PIN 1 = white = digital input 1
PIN 2 = brown = 24 Vdc
PIN 3 = green = STROBE for external illuminator
PIN 4 = yellow = output 1
PIN 5 = gray = output 2
PIN 6 = pink = output 3
PIN 7 = blue = GND
PIN 8 = red = external trigger

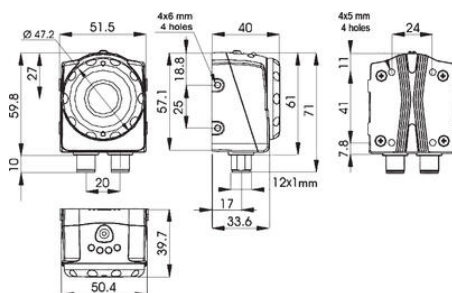

The Advanced Object Recognition (AOR) models integrate new important functionalities, including:



360° Pattern Match Locator
Object detection independent from rotations.



Logical tools
Possibility to combine the results of the single tools through boolean operator (AND, OR, NOT, etc.)




Advanced Ethernet
Current inspection results available also on Ethernet communication.




Speed-up
High execution speed thanks to the management of reduced resolution and TURBO mode.

360° Pattern match


The Advanced Object Recognition (AOR) models include all the controls and locators available on Object Recognition models as well as the new 360° Geometric Pattern Match Locator.

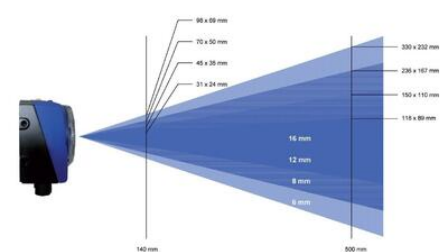



M12 4-pole Ethernet

PIN 1 = white/orange = RX+
PIN 2 = white/green = TX+
PIN 3 = orange = RX-
PIN 4 = green = TX-



M12 8-pole (power supply and I/O)

PIN 1 = white = digital input 1
PIN 2 = brown = 24 Vdc
PIN 3 = green = STROBE for external illuminator
PIN 4 = yellow = output 1
PIN 5 = gray = output 2
PIN 6 = pink = output 3
PIN 7 = blue = GND
PIN 8 = red = external trigger

Step 1: Image Setup



The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorize the image that will be used as a template during sensor functioning.

Step 2: Teach



The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry-out.

Step 3: Run



The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnostics.

