BERNSTEIN

SAFETY SWITCH ENK / VTU

601.6669.133
TONGUE SWITCH ENK-A2Z VTU



- Robust plastic body
- Actuator position in 45° steps
- UL and CSA approvals
- Also available with adjustable VTU actuator

PRODUCT DESCRIPTION

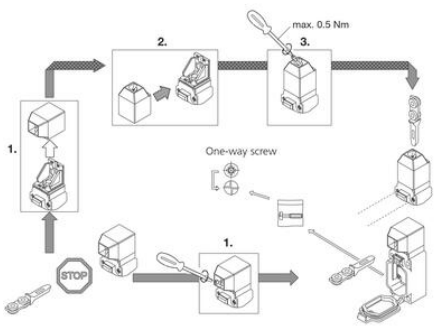
Bernstein ENK...VTU safety switches are an ideal choice for door and hatch applications without the need for eletronic locking. Spesifically made for demanding environments. Body made of glass fibre reinforced thermoplastic which offers durability and long service life.

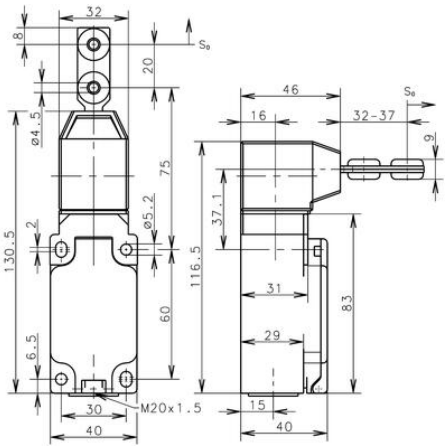
The actuating device is preferably started from 2 sides. By loosening the 4 screws the actuation assembly can be rotated in 90 degree increments such that 8 actuation directions are possible. The actuation assembly is to be again fastened to the housing using the 4 screws.

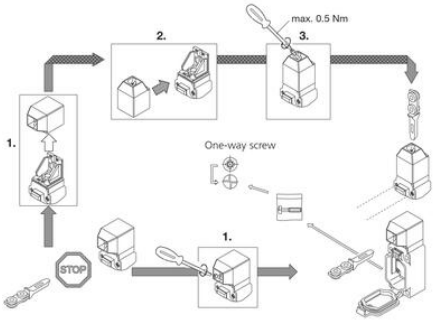
Selection offers various contact options, out of which NC safety contact is always force guided. Delivery includes a default actuator, adjustable actuator sold separately.

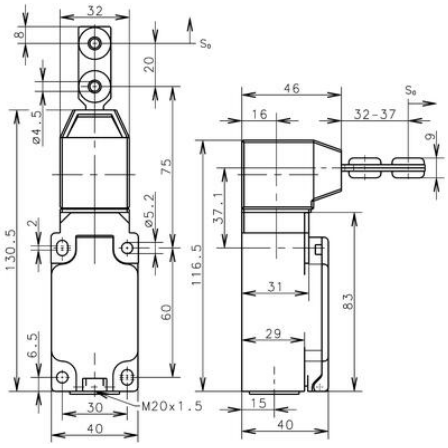
SPECIFICATIONS

Cable entry	M20x1,5
Contact type	2 NC
Hold The Power Key	20 N
IP Class	IP65
Temperature range from	-30 °C
Temperature range to	80 °C




32
8
20
S_o
ø4.5
75
ø5.2
2
130.5
60
6.5
30
40
M20x1.5
46
16
32-37
9
37.1
116.5
31
83
29
15
40


max. 0.5 Nm
2.
3.
1.
One-way screw
STOP
1.


32
8
20
S_o
ø4.5
75
ø5.2
2
130.5
60
6.5
30
40
M20x1.5
46
16
32-37
9
37.1
116.5
31
83
29
15
40