


SAFETY SWITCH ENK / VTU

601.6669.154

TONGUE SWITCH ENK-UV15Z VTU

- Robust plastic body
- Actuator position in 45° steps
- UL and CSA approvals
- Also available with adjustable VTU actuator

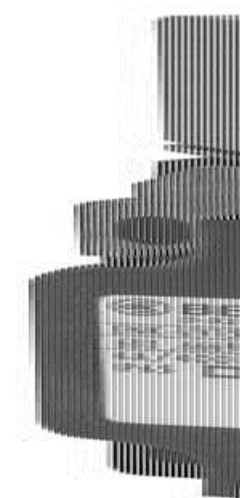

PRODUCT DESCRIPTION

Bernstein ENK...VTU safety switches are an ideal choice for door and hatch applications without the need for electronic locking. Specifically made for demanding environments. Body made of glass fibre reinforced thermoplastic which offers durability and long service life.

The actuating device is preferably started from 2 sides. By loosening the 4 screws the actuation assembly can be rotated in 90 degree increments such that 8 actuation directions are possible. The actuation assembly is to be again fastened to the housing using the 4 screws.

Selection offers various contact options, out of which NC safety contact is always force guided. Delivery includes a default actuator, adjustable actuator sold separately.

SPECIFICATIONS

Cable entry	M20x1,5
Contact type	1NO, 2 NC
Hold The Power Key	20 N
IP Class	IP65
Temperature range from	-30 °C
Temperature range to	80 °C

