

PUSHBUTTON ENCLOSURES




LBX130205

Box Empty Black Base Yellow Lid 1 Hole
"EMERGENCY STOP"

- 1, 2, 3, 4 and 5 hole pushbutton enclosures
- Pushbutton enclosure contact blocks



PRODUCT DESCRIPTION

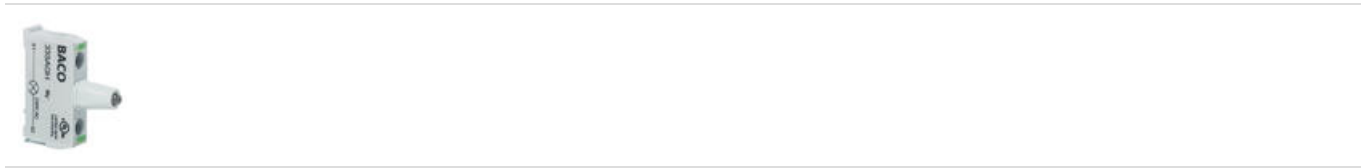
	1 hole	2 holes	3 holes	4 holes	5 holes
					
Grey Lid					
Order no.	LBX0100	LBX0200	LBX0300	LBX0400	LBX0500
Yellow Lid					
Order no.	LBX0100J				

PUSHBUTTON ENCLOSURE CONTACTS



Order no.

33S01	
33S10	



	 Red	 Green	 Yellow	 White	 Blue
24 V AC/DC LED					
Order no.	33SARL	33SAGL	33SAYL	33SAWL	33SABL
130 V AC LED					
Order no.	33SARM	33SAGM	33SAYM	33SAWM	33SABM
230 V AC LED					
Order no.	33SARH	33SAGH	33SAYH	33SAWH	33SABH

SPECIFICATIONS

Approvals	UL 508, CSA 22.2, BV, CB, CE
Cable entry	2xM16/M20
Climate resistance cyclic damp heat	IEC 60068-2-3
Climate resistance to sea air	IEC 60068-2-52
Climate-resistant heat	IEC 60068-2-30
Color enclosure	Yellow, Black
Impact resistance	IK07
IP Class	IP66
Protection Class	II
Temperature range bearing, from	-40 °C
Temperature range bearing, to	70 °C
Temperature range from	-25 °C
Temperature range to	70 °C
Text language	English

