

NON ILLUMINATED SELECTOR SWITCH

Knob Handle

L21UK03

"SELECTOR SW. STAY-PUT ""0-1-2"" BLACK"

- IP66
- 2 or 3 position
- Latching or spring return



PRODUCT DESCRIPTION

Non illuminated selector switch head with a knob handle that mount in a 22.5mm hole with protection rating IP66
Combine with separate clip and contact blocks to make complete switch assembly.

Standard body colour is black.

Available in 2 or 3 position, latching or spring return in various switching angles.



Supplied with a matt chrome bezel as standard.

For black plastic bezel change the part number from L21xxxx to L22xxxx.

SPECIFICATIONS

Angle	90°
Approvals	UL 508, CSA 22.2, BV, CB, CE
Climate resistance cyclic damp heat	IEC 60068-2-3
Climate resistance to sea air	IEC 60068-2-52
Climate-resistant heat	IEC 60068-2-30
Color	Black
Function	Stable
Illuminated	No
Impact resistance	IK05
IP Class	IP66, IP69, IP69K
Number of positions	3
Protection Class	II (double insulated)
Recommended Torque	3

Temperature range bearing, from	-40 °C
Temperature range bearing, to	70 °C
Temperature range from	-25 °C
Temperature range to	70 °C
Type/Model	Knob
Weight	17.8 g

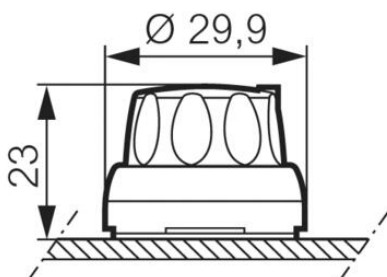

Kontaktien toiminta 3-asentoisille valintakytkimille (ei valoa)

Valintakytkimen asento paneelin edestä katsottuna
Kosketinyksiköiden toiminta paneelin edestä katsottuna

