

SWITCH DISCONNECTOR 25A

Rated Thermal Current I_{th} 25A

0172001

25A SWITCH & HANDLE 3P

- 3 pole switch body
- Front & rear mount
- Neutral & additional poles
- Handle & clutch drive options
- Enclosure mount options



PRODUCT DESCRIPTION

Switch disconnectors range with patented design reversible terminals to allow front or rear mount. Can be used to safely switch and isolate up to 690V thanks to a wider contact air gap of 7mm.

All switch body options have 3 poles with reversible terminals.
Up to 4 neutral poles / additional poles can be snapped on to a switch body (2 each side).
Up to 2 N/C+N/O auxiliary blocks / early break auxiliary blocks can be snapped on to a switch body (1 each side).
The maximum per switch body is 2 each side and the auxiliary contacts must be on the outside.

For rear mount the switch body simply snaps onto DIN rail. Note the reversible terminals need to be pushed up before clipping onto the DIN rail and then pushed back down to lock into place and reveal the terminal screw heads.


There are 3 clutch drive kits to accommodate different panel depths and the door interlock shroud ensures the panel door can only be opened in the OFF position.

For front mount various handle options are available that are either fixed by screw or ø22mm one-hole mounted.
All screw terminals are finger proof to IPxxB but additional terminal covers can be added if required.
Gasket kits are available to increase front of panel protection from IP40 to IP65.

SPECIFICATIONS

Approvals	CB, cUL, UL
Breaking Capacity Current	25 A
Color	Red/yellow
Connection solid wire max	10 mm ²
Connection stranded wire with ferrule max	6 mm ²
Connection stranded wire with ferrule min	0.75 mm ²
Conventional enclosed thermal current I_{the}	20 A
Conventional free air thermal current I_{th}	25 A
Mechanical life AC20 (million)	0.1

Mounting	Screw on, TS35
Number of poles	3
Protection rating front of panel	IP40
Protection rating rear of panel	IPxxB
Rated break capacity (Aeff/400V)	330 A
Rated impulse withstand voltage Uimp (Overvoltage cat III - Pollution 3)	6 kV
Rated insulation voltage Ui	690 V
Rated make capacity (Aeff/400V)	710 A
Rated operating current Ie (AC15/230V)	6 A
Rated operating current Ie (AC15/400V)	4 A
Rated operating current Ie (AC21A/22A)	25 A
Rated operating power (AC23A/3x230V)	5.5 kW
Rated operating power (AC23A/3x400V)	7.5 kW
Rated operating power (AC23A/3x500V)	7.5 kW
Rated operating power (AC23A/3x690V)	7.5 kW
Rated operating power (AC3/3x230V)	4 kW
Rated operating power (AC3/3x400V)	5.5 kW
Rated operating power (AC3/3x500V)	5.5 kW
Rated operating power (AC3/3x690V)	5.5 kW
Rated short circuit make capacity Icm (kA peak/400V)	1 kA
Rated short term withstand current Icw (Aeff/400V/1 s)	350 A
Rated uninterrupted current Iu	25 A
Short circuit current (kAeff/400 V)	10 kA
Short circuit current with fuse gI/gG (A)	25 A
Standards	CSA 22.2, IEC 60947-3 , UL 508
Temperature range bearing, from	-30 °C
Temperature range bearing, to	70 °C
Temperature range from	-30 °C
Temperature range to	70 °C
Type	Switch and handle

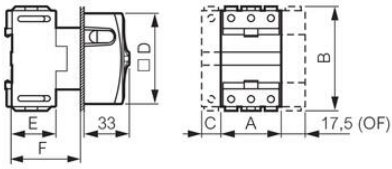

Dimensions

- A: 44
- B: 75.4
- C: 14.5
- D: □ 66
- E: 36
- F: 50

