

PR ONE CAM SWITCHES

16A

227610

PR ONE 16A "1-0-2" 2-POLES

- Excellent value for money
- Includes switch and knob
- Screw mount





PRODUCT DESCRIPTION

SPECIFICATIONS

Angle	45°
Area Cable Single Wire Max	4 mm ²
Cable Area Multi-Conductor Max	2.5 mm ²
Conventional free air thermal current Ith	20 A
Function	Stable
Mounting	Screw on
Number Of Contacts	4
Number of poles	2
Number of positions	3
Plate	48x48
Protection rating front of panel	IP40
Protection rating rear of panel	IP20
Rated insulation voltage Ui	690 V
Rated operating current Ie (AC15/230V)	6 A
Rated operating current Ie (AC21A/22A)	16 A
Rated operating power (AC23A/3x230V)	4 kW

Rated operating power (AC23A/3x400V)	7.5 kW
Rated operating power (AC3/3x230V)	3 kW
Rated operating power (AC3/3x400V)	4 kW
Standards	CB, CCC, CE, CSA, IEC 60947-3, IEC 60947-1, UL, UL 508
Temperature range from	-20 °C
Temperature range to	70 °C
Type/Model	Change-over switch

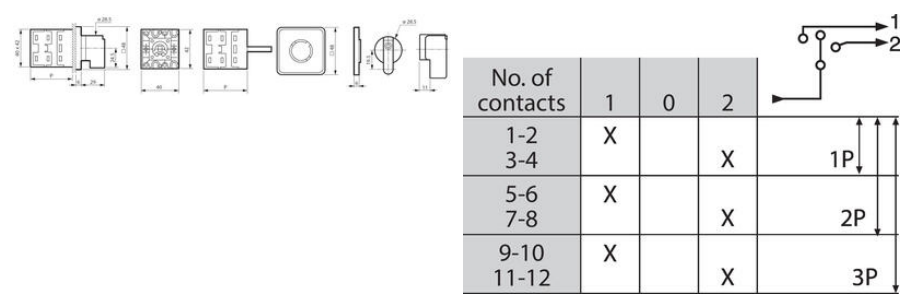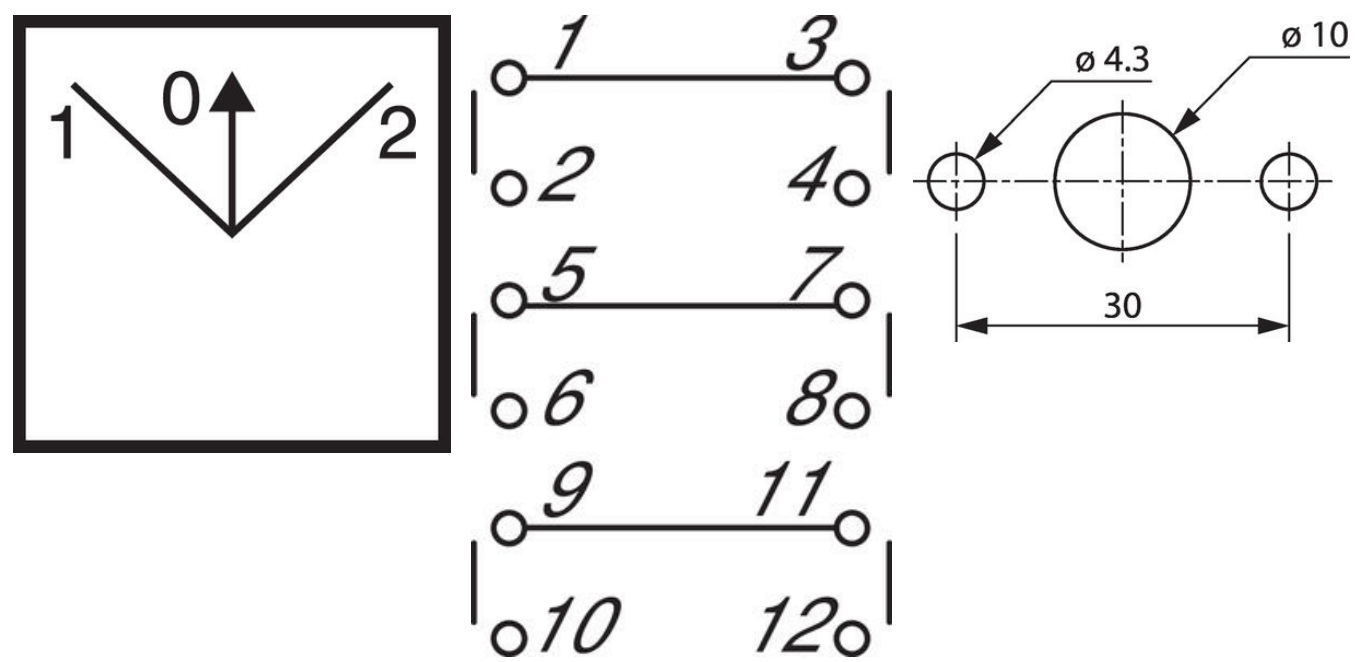

No. of contacts	1	0	2	
1-2	X			1P
3-4			X	
5-6	X			2P
7-8			X	
9-10	X			3P
11-12			X	