

## SR ROPE PULL SWITCH

601.1629.068

Cable pullswitch SR-U2Z-NA-QF-175-L0-0-0

- Rope length capabilities between 1-75 metres
- 2 NC+2 NO default
- Wire quick fix (QF versions)
- Wire tension indicator
- Robust design




### PRODUCT DESCRIPTION

Bernstein rope pull switch systems are ideally suited for emergency stop applications. The SR / SRM rope pull switch range offers a rugged plastic (SR) or metal (SRM) rope pull switch featuring an emergency stop impact button and integrated inspection window. The integrated window on both SR & SRM rope pull switches allows for easy checking of cable tension during installation.

#### Features:

- Enclosure/Cover SR - PA 6 GV (UL94-V0)
- Enclosure/Cover SRM - Die-cast aluminium
- Actuator - Die-cast Zinc / Steel
- Conforms to IEC 947-5-5, DIN EN 60947-5-5 and ISO 13850
- Quick fix quick-connect system makes eye stiffeners, cable grips and turnbuckles redundant
- Integrated inspection window enables checking of cable tension during installation
- 3 x M20 x 1.5 cable entries
- Protection class IP 67 according to IEC/EN 6052
- Mechanical service life = up to 1Mio

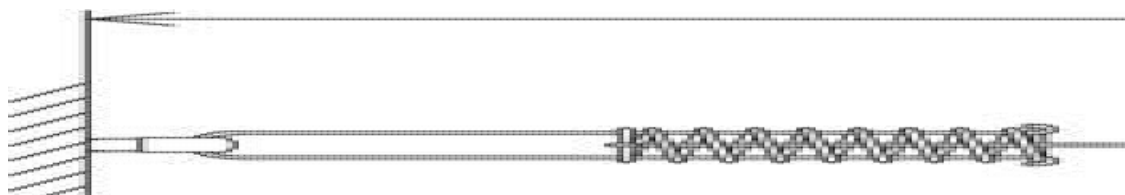

### SPECIFICATIONS

|                        |            |
|------------------------|------------|
| Contact type           | 2 NO, 2 NC |
| Lin length max         | 37,5 m     |
| IP Class               | IP67       |
| Temperature range from | -25 °C     |

|                      |                   |
|----------------------|-------------------|
| Temperature range to | 70 °C             |
| Height               | 294 mm            |
| Width                | 42.5 mm           |
| Depth                | 76.8 mm           |
| Cable entry          | 3x M20x1,5        |
| Voltage Max          | 250 V             |
| Material of body     | PA6               |
| B10d                 | 100 000           |
| Approvals            | CCC, cCSAus, DGUV |

