

SR ROPE PULL SWITCH

601.1621.066

Rope pull switch SR-U2Z-0-LU-300-L0-0-0, ≤75 m

- Rope length capabilities between 1-75 metres
- 2 NC+2 NO default
- Wire quick fix (QF versions)
- Wire tension indicator
- Robust design




PRODUCT DESCRIPTION

Bernstein rope pull switch systems are ideally suited for emergency stop applications. The SR / SRM rope pull switch range offers a rugged plastic (SR) or metal (SRM) rope pull switch featuring an emergency stop impact button and integrated inspection window. The integrated window on both SR & SRM rope pull switches allows for easy checking of cable tension during installation.

Features:

- Enclosure/Cover SR - PA 6 GV (UL94-V0)
- Enclosure/Cover SRM - Die-cast aluminium
- Actuator - Die-cast Zinc / Steel
- Conforms to IEC 947-5-5, DIN EN 60947-5-5 and ISO 13850
- Quick fix quick-connect system makes eye stiffeners, cable grips and turnbuckles redundant
- Integrated inspection window enables checking of cable tension during installation
- 3 x M20 x 1.5 cable entries
- Protection class IP 67 according to IEC/EN 6052
- Mechanical service life = up to 1Mio

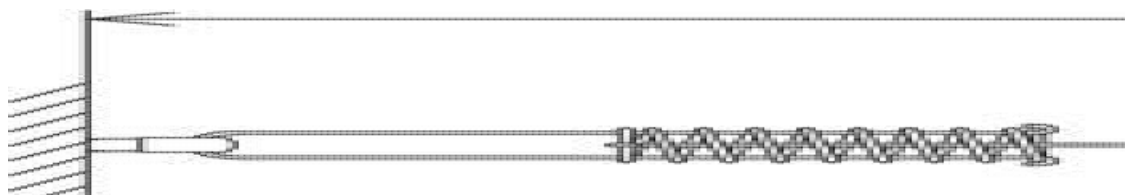

SPECIFICATIONS

Contact type	2 NO, 2 NC
Lin length max	75 m
IP Class	IP67
Temperature range from	-25 °C

Temperature range to	70 °C
Height	224 mm
Width	42.5 mm
Depth	76.8 mm
Cable entry	3x M20x1,5
Voltage Max	250 V
Material of body	PA6
B10d	100 000
Approvals	CCC, cCSAus, DGUV

