

## TIMER MODULE FOR C3 RELAYS

CT3K30U

TIMECUBE 180-265VAC/DC (BLUE)

- Provides 3 change-over contacts
- Wide input voltage range, AC/DC
- Multi-time 0.2 s – 30 min.




### PRODUCT DESCRIPTION

#### Example of use

The CT3 Timecube is an electronic timer that is inserted between the plug-in industrial relay and the socket. This combination is a modular complete time relay without additional space requirement. It offers up to three changeover contacts with a variety of signal contacts and power contacts.

The Timecubes are suitable for all 8 pin and 11 pin standard industrial relays of the C2 and C3 series according to IEC 67 and also for relays of other manufacturers.

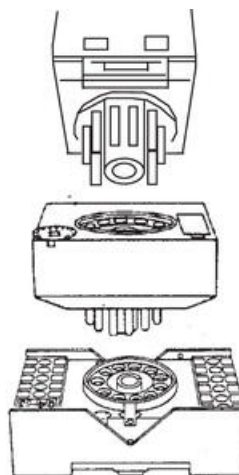


Relay C3-A30  
Time cube CT3  
Socket S3-B




### SPECIFICATIONS

<b>Nominal Voltage</b>	180-265 V AC/DC
<b>Power Consumption</b>	6 mA
<b>Response time</b>	AC-80 ms / DC-50 ms
<b>Leakage current</b>	≤ 0.2 mA

IP Class	IP40
Material	Lexan
Temperature range from	-25 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	70 °C
Temperature range to	60 °C
Weight	35 g
Recovery Time	200 ms
Approvals	CE, CSA, RoHS, UL
Time Range	0,2 s - 30 min

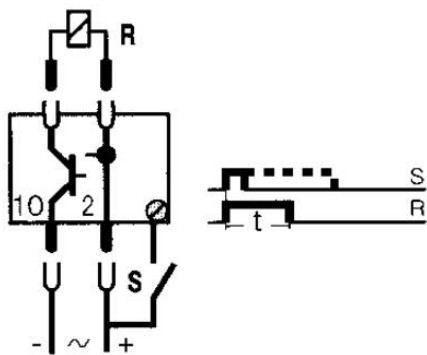


Range	DIP switch	Time
0,2 - 3 s		Adjusting knob 1 ... 10
2 - 30 s		
0,2 - 3 min		
2 - 30 min		

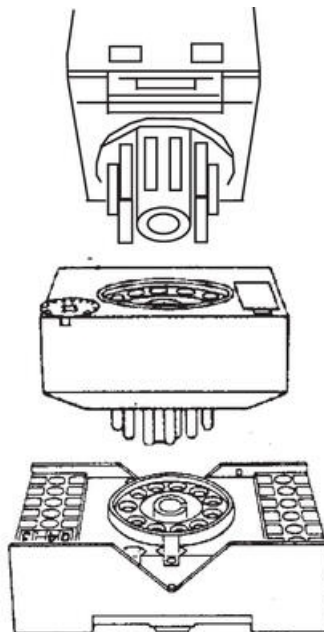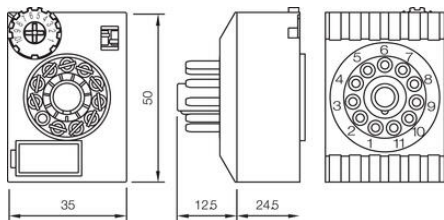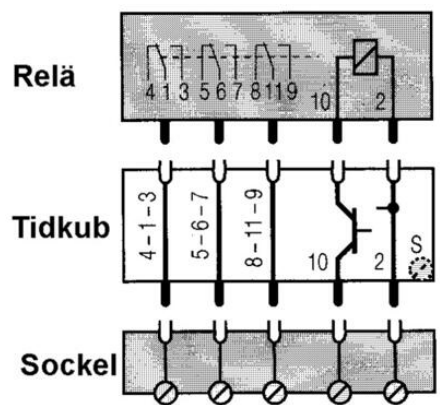


Range	DIP switch	Time
0,2 - 3 s		Adjusting knob 1 ... 10
2 - 30 s		
0,2 - 3 min		
2 - 30 min		

Relä



Tidkub



Socket

