SOCKETS FOR C3 INDUSTRIAL RELAYS

3-pole

S3B
SOCKET 11 PIN DIN RAIL MOUNT



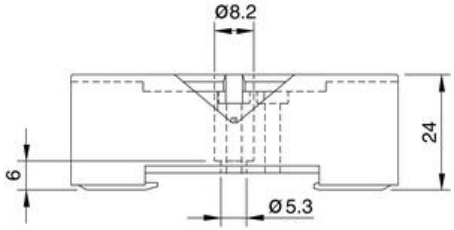
- Both DIN and EN connection numbering
- Semi-protected
- Can be equipped with S3BC code system
- Integrated retaining bow

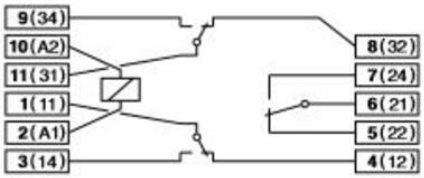
PRODUCT DESCRIPTION

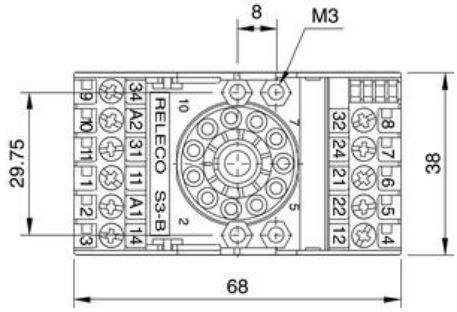
SPECIFICATIONS

Switching Capability Voltage	250 V
Breaking Capacity Current	10 A

Isolation conn./conn.	2500 V
Isolation connection/rail	2500 V
Material	Lexan
Torque Connection	0.7
Screw size	M3, Pozi
Cross section stranded	0,35-2,5 mm²
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range to	60 °C
Weight	55 g


Ø8.2
24
6
Ø5.3


9(34)
10(A2)
11(31)
1(11)
2(A1)
3(14)
8(32)
7(24)
6(21)
5(22)
4(12)


8
M3
29.75
38
68
RELECO S3-B
34 A2 31 11 A1 14
32 24 21 22 12
9 10 1 2 3
8 7 6 5 4