

C10 INTERFACE RELAY

1-pole 10 A

C10A10BX24AD
 Relay 5 Pin 1 Pole BR LED 24V ac/dc

- Robust flat pins, for industrial applications
- Both mechanical and LED indication
- Colour-coded test button
- Twin contact for low loads



PRODUCT DESCRIPTION

SPECIFICATIONS

Nominal power ac	1.1 VA
Nominal power dc	0.7 W
Coil Voltage AC / DC	24 V AC/DC
Overvoltage UNX Max	1.1
OFF-Voltage Un Max	0.1
Number Of Contacts	1
Contact Material	AgNi
Switching Capability Voltage	250 V
Breaking Capacity Current	10 A
Recommended Min Load	10 mA / 10 V
Surge Current (20Ms)	30 A
Release Time	5 ms
Release Time Kontaktstudtid	8 ms
IP Class	IP40
Insulation Class EN60947	250 V (pollution 3, Group C)
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C

Temperature range bearing, to	80 °C
Temperature range to	70 °C
Frequency	50 Hz
Optional Coil	BX (unicoil)
Approvals	CCC, CE, CSA, Gost R, RoHS, UL
Type of relay	Industrial relays

Fig. 2 DC load limit curve




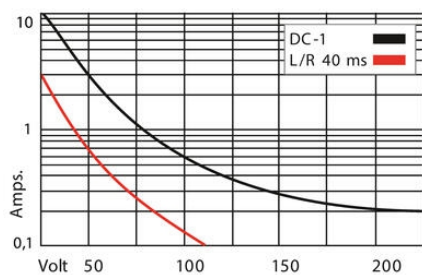


Fig. 1 AC voltage endurance

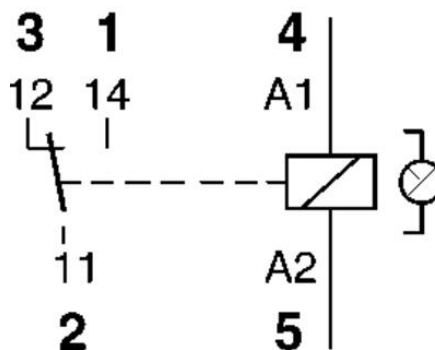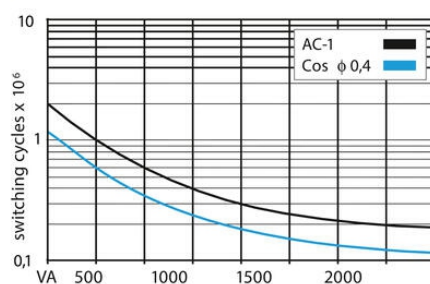

C10-A10BX 02

10A 250V AC-1
10A 30V DC-1



A2 — A1



CE EAC

Made in India

