

C12 INTERFACE RELAY

2-pole 5 A

C12A22BX24AD

Relay 8 Pin 2 Pole 3 μ Au BR LED 24V ac/dc

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components




PRODUCT DESCRIPTION

SPECIFICATIONS


Working Un	0,8-1,10
Nominal power ac	1.1 VA
Nominal power dc	0.7 W
Coil Voltage AC / DC	24 V AC/DC
Overvoltage UNX Max	1.1
Response Time	10 ms
Number Of Contacts	2
Contact Material	AgNi + 3 μ Au
Switching Capability Voltage	250 V
Breaking Capacity Current	5 A
The Recommended Maximum Load	5 A/250 V AC 1; 0,5A/110 V DC-1
Recommended Min Load	5 mA/5 V
Surge Current (20Ms)	15 A
Bounce Time	1
Release Time	5 ms
Release Time Kontaktstudtid	8 ms
IP Class	IP40

Isolation Contact / Contact	3000 V
Isolation Contact / Coil	5000 V
Frequency	50 Hz
Optional Coil	BX (unicoil)
Weight	21 g


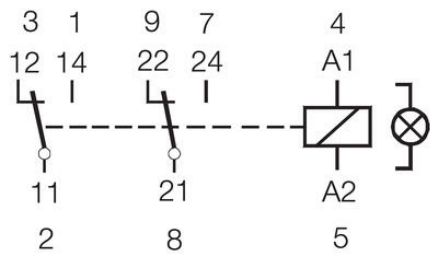


C12-A22BX 02

5A 250V AC-1
5A 30V DC-1



A2 — A1



CE EAC
Made in India

