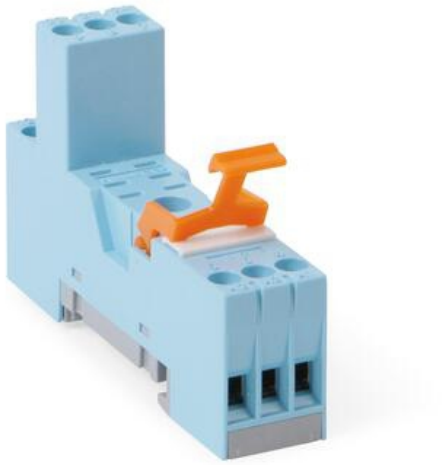
SOCKETS FOR C12 INTERFACE RELAYS

2-pole

S-12
SOCKET IRC FOR DPDT RELAYS




- I/O connection
- Small construction dimensions, only 16,9 mm wide
- Strappable A2 for block mounting
- Retaining bow included
- Robust screws and terminal openings

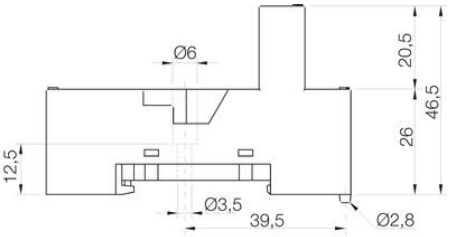
PRODUCT DESCRIPTION


SPECIFICATIONS

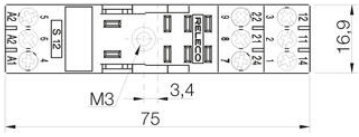
Switching Capability Voltage	250 V
Breaking Capacity Current	5 A

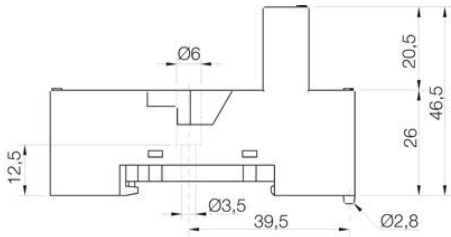
Isolation conn./conn.	2500 V
Isolation connection/rail	5000 V
Material	Lexan
Torque Connection	0.7
Screw size	M3, Pozi
Cross section stranded	0,35-2,5 mm²
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range to	60 °C
Weight	31 g

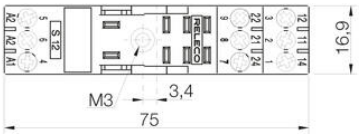



Ø6
20,5
46,5
26
12,5
Ø3,5
39,5
Ø2,8


5(A2)
6(A2)
4(A1)
9(22)
8(21)
7(24)
3(12)
2(11)
1(14)


16,9
M3
3,4
75


Ø6
20,5
46,5
26
12,5
Ø3,5
39,5
Ø2,8


16,9
M3
3,4
75