

C7 MINIATURE RELAY

2-pole 10 A

C7W10X230A

Relay QRC 1-pole WOLFRAM, LED, 230VAC

- Colour-coded test button, both lockable and non-locking
- Marking system
- Mechanical indication



PRODUCT DESCRIPTION

SPECIFICATIONS

Working Un	0,8-1,10
Nominal power ac	1.5 VA
Coil Voltage AC	230 V AC
Response Time	20 ms
OFF-Voltage Un Max	0.25
Number Of Contacts	1
Contact Material	AgNi/W
Switching Capability Voltage	250 V
Breaking Capacity Current	10 A
The Recommended Maximum Load	10 A/250 V AC-1; 6 A/250 V AC-5a/b
Recommended Min Load	10 mA/10 V
Surge Current (20Ms)	500 A
Bounce Time	3
Release Time	10 ms
Release Time Kontaktstuds tid	11 ms
IP Class	IP40

Isolation Contact / Coil	2500 V
Insulation Class EN60947	250 V Pollution 3, Group C
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range to	60 °C
Frequency	50 Hz
Optional Coil	X (LED)
Weight	43 g
Approvals	CE, Gost R, RoHS, CCC, Lloyd's

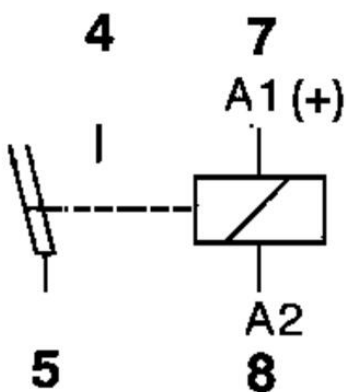


Fig. 2 AC voltage endurance

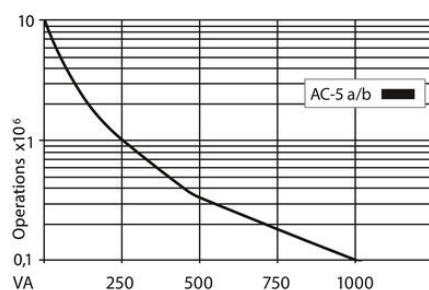


Fig. 1 AC voltage endurance

