

## C9 MINIATURE RELAY

4-pole 5 A

C9A4224D

Relay 14 Pin 4 Pole 10 $\mu$  Au 24V dc

- Colour-coded test button, both lockable and non-locking
- Marking system
- Mechanical indication



### PRODUCT DESCRIPTION


## SPECIFICATIONS

Working Un	0,8-1,1
Nominal power dc	1 W
Coil Voltage DC	24 V DC
OFF-Voltage Un Max	0.25

Number Of Contacts	4
Contact Material	AgNi + 10 $\mu$ Au
Switching Capability Voltage	250 V
Breaking Capacity Current	5 A
The Recommended Maximum Load	5 A/250V AC-1; 5 A/30 V DC-1
Recommended Min Load	1 mA/1 V
Resistive Load 110 V DC Max	50 W
Resistive Load 24 V dc Max	100 W
Surge Current (20Ms)	15 A
Release Time	6 ms
Release Time Kontaktstudstid	7 ms

IP Class	IP40
Isolation Contact / Contact	2500 V
Isolation Contact / Coil	2000 V

Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range to	60 °C
Frequency	50 Hz
Weight	43 g
Approvals	CE, Gost R, RoHS, CCC, CSA, Lloyd's, UL

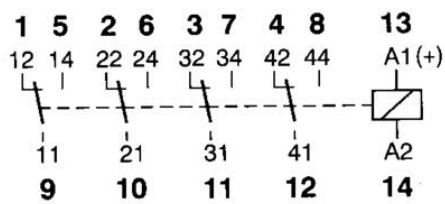

04

## C9-A42

---

AC 1.5 VA    DC 0.9W

---

5A/250V AC-1  
 5A/30V DC-1

---

14 — — 13

12  
8

4

11  
7

3

10  
6

2

9  
5

1

