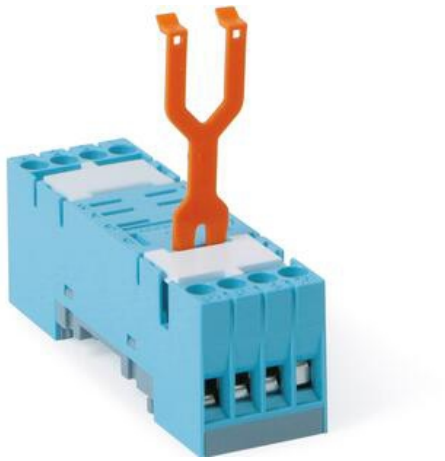
SOCKETS FOR C7 MINIATURE RELAYS

2-pole

S7C
SOCKET QRC 8 PIN



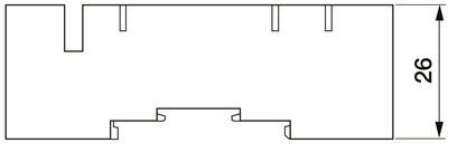
- Rail or screw mount
- Semi-protected
- Small construction dimensions, only 22.5 mm wide
- Supplied with open connections

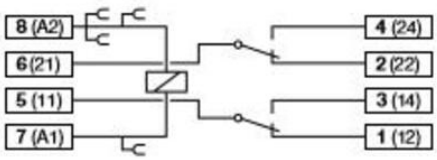
PRODUCT DESCRIPTION

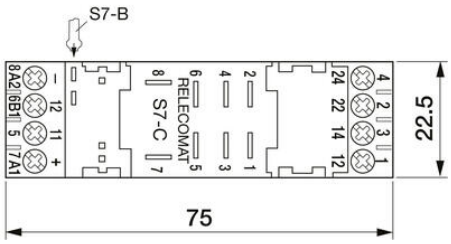
SPECIFICATIONS

Switching Capability Voltage	250 V
Breaking Capacity Current	10 A

Isolation conn./conn.	2500 V
Isolation connection/rail	2500 V
Material	Lexan
Torque Connection	0.7
Screw size	M3, Pozi
Cross section stranded	0,75-1,5 mm²
Temperature range from	-40 °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range to	60 °C
Weight	37 g


26


8 (A2)
6 (21)
5 (11)
7 (A1)
4 (24)
2 (22)
3 (14)
1 (12)


S7-B
8A2
6B1
5
7A1
12
11
+
RELECOMAT
S7-C
8
6
4
2
5
3
1
24
22
14
12
4
2
3
1
22.5
75