
DUAL THERMOSTAT - ZR 011

ZR

01172.0-00
ZR 011 Dual thermostat, 0-60°C, normally open and closed

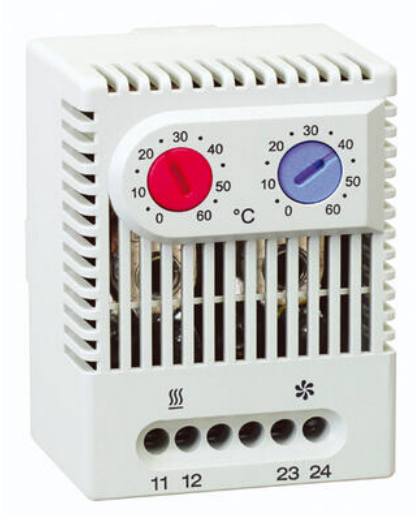

- Compact
- Separately adjustable max. and min. temperatures
- High breaking capacity

PRODUCT DESCRIPTION

ZR011 is two thermostats in the same casing. One with a breaking contact for regulation of the heater and one with a closing contact for, for example, regulation of the filter fan or activation of overheating protection.

SPECIFICATIONS

Control range temperature from	0 °C
Control range temperature to	60 °C
Hysteresis Temperature	7K
Tolerance switch off	±4K
Tolerance for switch on	±4K

Voltage max	250 V ac
Inrush Max	16 A
Contact resistance	<10 mΩ
Operating Humidity	< 90% RH
Humidity Storage	<90% RH
IP Class	IP20
Torque max	0.5
Material of body	Plastic
Material Plastic Housing	Plastic
Flamklass	UL94-V0

Operational Temperature	-45°C ... +80°C
Storage temperature	-45°C ... +80°C

Height	67 mm
Width	50 mm
Depth	46 mm
Weight	0.09 kg

Approvals	CE, CSA, cULus, EAC, EMC, RoHS, UL E164102, VDE

