

750809
Signal Converter PT-100 2-tråd/ 24V






PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	CE, cULus, RoHS
Cross Section Max	1.5 mm ²
Insulation voltage in/out	1500 V
IP Class	IP20
Linearity	<0,1 % av max.värdet
Load impedance power	<400 Ω
Load impedance voltage	>55 kΩ
Power Consumption	0.3 W
Power Supply AC max	28.8 V
Power Supply AC min	19.2 V
Power Supply DC max	30 V
Power Supply DC min	16.8 V
Rise Time	30 ms
Temperature coefficient	<150 ppm °C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C

Temperature range from	-50 °C
Temperature range to	200 °C

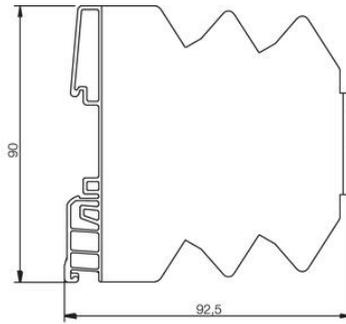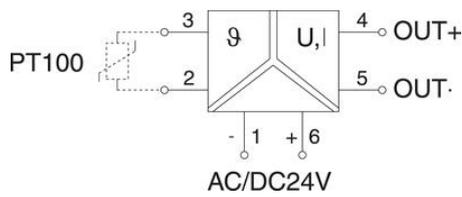

• → Switch On		S1					
Input	Output	1	2	3	4	5	6
-50 - 150 °C	0-10 V						
-50 - 150 °C	0-20 mA	•					
-50 - 150 °C	4-20 mA		•				
0 - 100 °C	0-10 V	•	•				
0 - 100 °C	0-20 mA				•		
0 - 100 °C	4-20 mA	•		•			
0 - 200 °C	0-10 V			•	•		
0 - 200 °C	0-20 mA	•	•	•			
0 - 200 °C	4-20 mA						•

• → Switch On		S1					
Input	Output	1	2	3	4	5	6
-50 - 150 °C	0-10 V						
-50 - 150 °C	0-20 mA		•				
-50 - 150 °C	4-20 mA			•			
0 - 100 °C	0-10 V		•	•			
0 - 100 °C	0-20 mA				•		
0 - 100 °C	4-20 mA		•		•		
0 - 200 °C	0-10 V			•	•		
0 - 200 °C	0-20 mA		•	•	•		
0 - 200 °C	4-20 mA						•

