

750833
Signal Converter Typ-J. 24V 2-vägs.





PRODUCT DESCRIPTION

SPECIFICATIONS



Approvals	CE, cULus, RoHS
Cross Section Max	1.5 mm ²
IP Class	IP20
Linearity	<0,1 % av max.värdet
Load impedance power	<400 Ω
Load impedance voltage	>5 kΩ
Power Consumption	8 mA
Power Supply AC max	28.8 V
Power Supply AC min	19.2 V
Power Supply DC max	30 V
Power Supply DC min	16.8 V
Reaction time	33 ms
Temperature coefficient	<150 ppm/°C
Temperature range bearing, from	-40 °C
Temperature range bearing, to	80 °C
Temperature range from	-50 °C

Temperature range to

600 °C

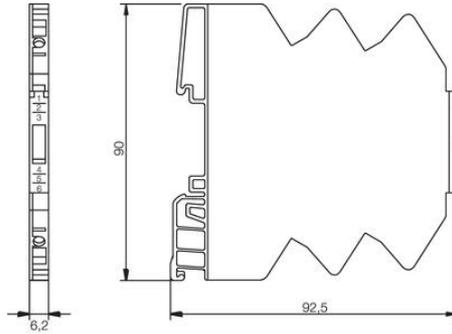

Input	Output	SwitchOn S1					
		1	2	3	4	5	6
-50 - 200 °C	0-10 V						
-50 - 200 °C	0-20 mA		•				
-50 - 200 °C	4-20 mA			•			
0 - 400 °C	0-10 V		•	•			
0 - 400 °C	0-20 mA				•		
0 - 400 °C	4-20 mA		•		•		
0 - 600 °C	0-10 V			•	•		
0 - 600 °C	0-20 mA		•	•			
0 - 600 °C	4-20 mA						•

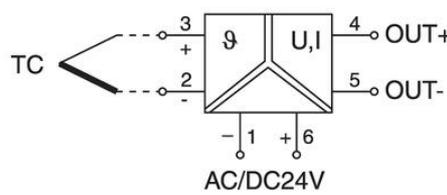

Input	Output	SwitchOn S1					
		1	2	3	4	5	6
-50 - 200 °C	0-10 V						
-50 - 200 °C	0-20 mA		•				
-50 - 200 °C	4-20 mA			•			
0 - 400 °C	0-10 V		•	•			
0 - 400 °C	0-20 mA				•		
0 - 400 °C	4-20 mA		•		•		
0 - 600 °C	0-10 V			•	•		
0 - 600 °C	0-20 mA		•	•	•		
0 - 600 °C	4-20 mA						•

